

# **The Effects of Missouri River Mainstem Reservoir System Operations on 2011 Flooding Using a Precipitation-Runoff Modeling System Model**

Chapter K of  
**2011 Floods of the Central United States**

Professional Paper 1798–K

**U.S. Department of the Interior**  
**U.S. Geological Survey**

**Front cover.** Overflow at Craig, Missouri, with Interstate 29 in the foreground, July 8, 2011. Photograph by Jeff Herzer ([jeffherzer.com](http://jeffherzer.com)) and Missouri State Highway Patrol. Pilot: Sgt. Kevin G. Haywood.

**Back cover.** Overflow at Corning, Missouri, with Interstate 29 in the foreground, July 8, 2011. Photograph by Jeff Herzer ([jeffherzer.com](http://jeffherzer.com)) and Missouri State Highway Patrol. Pilot: Sgt. Kevin G. Haywood.

# **The Effects of Missouri River Mainstem Reservoir System Operations on 2011 Flooding Using a Precipitation-Runoff Modeling System Model**

By Adel E. Haj, Daniel E. Christiansen, and Roland J. Viger

Chapter K of  
**2011 Floods of the Central United States**

Professional Paper 1798–K

**U.S. Department of the Interior**  
**U.S. Geological Survey**

**U.S. Department of the Interior**  
SALLY JEWELL, Secretary

**U.S. Geological Survey**  
Suzette M. Kimball, Acting Director

U.S. Geological Survey, Reston, Virginia: 2014

For more information on the USGS—the Federal source for science about the Earth, its natural and living resources, natural hazards, and the environment, visit <http://www.usgs.gov> or call 1–888–ASK–USGS.

For an overview of USGS information products, including maps, imagery, and publications, visit <http://www.usgs.gov/pubprod>

To order this and other USGS information products, visit <http://store.usgs.gov>

Any use of trade, firm, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Although this information product, for the most part, is in the public domain, it also may contain copyrighted materials as noted in the text. Permission to reproduce copyrighted items must be secured from the copyright owner.

Suggested citation:

Haj, A.E., Christiansen, D.E., and Viger, R.J., 2014, The effects of Missouri River mainstem reservoir system operations on 2011 flooding using a Precipitation-Runoff Modeling System model: U.S. Geological Survey Professional Paper 1798–K, 33 p., <http://dx.doi.org/10.3133/pp1798K>.

ISSN 2330-7102 (online)

# Contents

Abstract.....	1
Introduction.....	2
Purpose and Scope .....	2
Modeling Methods and Techniques .....	2
Delineation and Parameterization of Spatial Features.....	5
Precipitation-Runoff Modeling System (PRMS) Input Data .....	9
Surface-Water Model Calibration.....	9
Missouri River Model Performance .....	18
The Effects of Missouri River Mainstem Reservoir System Operations on 2011 Flooding.....	19
Comparison of Simulated (Unregulated) Flows and Measured (Regulated) Flows.....	19
Fort Peck Dam and Culbertson, Montana.....	24
Garrison Dam and Bismarck, North Dakota .....	25
Oahe Dam, South Dakota .....	25
Big Bend Dam, South Dakota .....	25
Fort Randall Dam, South Dakota .....	25
Gavins Point Dam, South Dakota .....	25
Sioux City, Iowa.....	28
Omaha, Nebraska .....	28
Nebraska City, Nebraska.....	28
Saint Joseph, Missouri .....	28
Kansas City, Missouri.....	29
Glasgow, Missouri .....	29
Boonville, Missouri.....	29
Hermann, Missouri .....	29
Saint Charles, Missouri.....	30
Model Limitations.....	30
Summary.....	31
References Cited.....	32

## Figures

1. Map showing location of Missouri River Basin.....	3
2. Map showing location of U.S. Army Corps of Engineers major dams along the Missouri River .....	4
3. Schematic diagram of a watershed and its meteorological inputs (precipitation, air temperature, and solar radiation) simulated by the Precipitation-Runoff Modeling System .....	6
4. Map showing subbasins and Hydrologic response units in the Missouri River Precipitation-Runoff Modeling System model.....	7
5. Map showing stream segments for the Precipitation-Runoff Modeling System representation of the hydrologic system.....	8
6. Map showing location of U.S. Geological Survey streamgages used in the Missouri River Precipitation-Runoff Modeling System model.....	13
7. Graphs showing daily mean streamflow simulated using the Missouri River Precipitation-Runoff Modeling System model as compared to calibration streamflow data sets (simulated unregulated streamflow and naturalized unregulated streamflow, and simulated regulated streamflow and measured regulated streamflow) for selected locations on the Missouri River during 2011 water year .....	16
8. Photograph showing overbank storage near KCP&L Power Plant, Weston, Missouri, upstream from Kansas City, Missouri.....	19
9. Graphs showing unregulated daily mean streamflow simulated using the Missouri River Precipitation-Runoff Modeling System model as compared to measured regulated streamflows for selected locations on the Missouri River during 2011 water year .....	22

## Tables

1. U.S. Geological Survey streamgages used in the Missouri River Precipitation-Runoff Modeling System model.....	10
2. Calibrated parameters and calibration steps used in the Missouri River Precipitation-Runoff Modeling System model.....	14
3. Statistical test results for model performance at selected U.S. Geological Survey streamgages used in the Missouri River Precipitation-Runoff Modeling System model .....	20
4. Maximum measured and maximum simulated daily average discharge and number of days that the National Weather Service flood category stage threshold was exceeded for selected U.S. Geological Survey streamgages and United States Army Corps of Engineers dam outflow sites .....	26

## Conversion Factors

Inch/Pound to SI

<b>Multiply</b>	<b>By</b>	<b>To obtain</b>
Length		
mile (mi)	1.609	kilometer (km)
Area		
acre	4,047	square meter (m <sup>2</sup> )
acre	0.004047	square kilometer (km <sup>2</sup> )
square mile (mi <sup>2</sup> )	2.590	square kilometer (km <sup>2</sup> )
Volume		
cubic foot (ft <sup>3</sup> )	0.02832	cubic meter (m <sup>3</sup> )
acre-foot (acre-ft)	1,233	cubic meter (m <sup>3</sup> )
Flow rate		
foot per second (ft/s)	0.3048	meter per second (m/s)
cubic foot per second (ft <sup>3</sup> /s)	0.02832	cubic meter per second (m <sup>3</sup> /s)

Temperature in degrees Fahrenheit (°F) may be converted to degrees Celsius (°C) as follows:

$$^{\circ}\text{C}=(^{\circ}\text{F}-32)/1.8$$

Vertical coordinate information is referenced to the National Geodetic Vertical Datum of 1929 (NGVD 29).

Horizontal coordinate information is referenced to the North American Datum of 1983 (NAD 83).

Altitude, as used in this report, refers to distance above the vertical datum.

Water year, as used in this report, refers to the 12-month period October 1 through September 30. It is designated by the calendar year in which it ends.



Drained scour hole west of Mound City, Missouri where Missouri Trooper Fred Guthrie and his K-9 Reed were swept away by floodwaters, November 2011. Photograph by Jeff Herzer ([jeffherzer.com](http://jeffherzer.com)) and Missouri State Highway Patrol. Pilot: Sgt. Kevin G. Haywood.

# The Effects of Missouri River Mainstem Reservoir System Operations on 2011 Flooding Using a Precipitation-Runoff Modeling System Model

By Adel E. Haj, Daniel E. Christiansen, and Roland J. Viger

## Abstract

In 2011 the Missouri River Mainstem Reservoir System (Reservoir System) experienced the largest volume of flood waters since the initiation of record-keeping in the nineteenth century. The high levels of runoff from both snowpack and rainfall stressed the Reservoir System's capacity to control flood waters and caused massive damage and disruption along the river. The flooding and resulting damage along the Missouri River brought increased public attention to the U.S. Army Corps of Engineers (USACE) operation of the Reservoir System.

To help understand the effects of Reservoir System operation on the 2011 Missouri River flood flows, the U.S. Geological Survey Precipitation-Runoff Modeling System was used to construct a model of the Missouri River Basin to simulate flows at streamgages and dam locations with the effects of Reservoir System operation (regulation) on flow removed. Statistical tests indicate that the Missouri River Precipitation-Runoff Modeling System model is a good fit for high-flow monthly and annual stream flow estimation. A comparison of simulated unregulated flows and measured regulated flows show that regulation greatly reduced spring peak flow events, consolidated two summer peak flow events to one with a markedly decreased magnitude, and maintained higher than normal base flow beyond the end of water year 2011. Further comparison of results indicate that without regulation, flows greater than those measured would have occurred and been sustained for much longer, frequently in excess of 30 days, and flooding associated with high-flow events would have been more severe.

Overflow at Craig, Missouri, with Interstate 29 in the foreground, July 8, 2011. Photograph by Jeff Herzer (jeffherzer.com) and Missouri State Highway Patrol. Pilot: Sgt. Kevin G. Haywood.



## Introduction

The Missouri River, a tributary to the Mississippi River, drains about 529,350 mi<sup>2</sup>, approximately one-sixth of the conterminous United States, and encompasses parts of 10 States and Canada (Sprague and others, 2006) (fig. 1). The Missouri River flows through the largest reservoir system in North America. The Missouri River Mainstem Reservoir System (Reservoir System), authorized by the 1944 Flood Control Act, consists of six dams (and reservoirs) constructed on the Missouri River—Fort Peck Dam (Fort Peck Lake), Garrison Dam (Lake Sakakawea), Oahe Dam (Lake Oahe), Big Bend Dam (Lake Sharpe), Fort Randall Dam (Lake Francis Case), and Gavins Point Dam (Lewis and Clark Lake) (U.S. Army Corps of Engineers, 2006) (fig. 2). The Northwestern Division of the U.S. Army Corps of Engineers (USACE) operates the Reservoir System to manage Missouri River flows (hereafter referred to as regulation) for congressionally authorized purposes of flood control, irrigation, navigation, hydroelectric power generation, water supply, water quality, recreation, and fish and wildlife enhancement (U.S. Army Corps of Engineers, 2006). Flows in the Missouri River represent contributions from large tributary watersheds, such as the Yellowstone, the Cheyenne, the White, the Platte, the Kansas, and the Republican Rivers (fig. 2), and are affected by a wide range of climate conditions and land-use practices.

The USACE maintains records of Missouri River Basin runoff volumes dating back to 1898. In 2011 the Reservoir System experienced the largest volume of flood waters since the initiation of record-keeping. During 2011, the annual runoff into the Reservoir System (upstream of Sioux City, Iowa) was estimated at 60.8 million acre-feet (MAF). In comparison, the previous greatest annual runoff volumes were 49 MAF in 1997 and about (roughly estimated) 50 MAF in 1881. The Reservoir System flood-control storage allocation and flood-control management was patterned after the 1881 flood event, during which an estimated 40 MAF of runoff was produced during March–July. During 2011, the March–July runoff was 48.7 MAF, greatly exceeding the previous record of 36.6 MAF in 1997. The 2011 annual runoff volume of 60.8 MAF equates to an average daily rate of about 83,980 cubic feet per second (ft<sup>3</sup>/s) over a 12-month period (Grigg and others, 2011). The high levels of runoff from both snowpack and rainfall stressed the Reservoir System’s capacity to control flood waters and caused massive damage and disruption along the river (National Oceanic and Atmospheric Administration, 2011). The flooding and resulting damage during 2011 brought increased public attention to the USACE operation of the Reservoir System.

Reservoir System regulation prior to 2011 did not completely eliminate flood damages during major floods. Flood damages on the Missouri River downstream of the Reservoir System occurred in 1952, 1967, 1975, 1993, 1996, 1997, and 1999. However, in likely all cases, regulation reduced flood stages in all downstream reaches, resulting in a substantial

flood-damage reduction (Grigg and others, 2011). The exception is 1952 when only Fort Peck Dam had been constructed (Grigg and others, 2011).

The 1952 flood established record flows throughout the basin and was a result of exceptional runoff from snowmelt. At the end of March, one of the heaviest snow covers on record was present on the upper Plains. In April, a peak discharge of 500,000 ft<sup>3</sup>/s occurred at Bismarck, North Dakota—compared to 2011 levels of about 150,000 ft<sup>3</sup>/s as a result of releases from Garrison Dam. Although peak discharges were recorded along most of the Missouri River reaches, peak flows generally decreased downstream because most of the runoff originated upstream in Montana, North Dakota, and South Dakota as a result of snowmelt (Grigg and others, 2011). Because of the mostly unregulated conditions, as well as availability of measured discharges and stages of the record high flows, the 1952 flood is useful for comparison with simulated, unregulated 2011 flows.

In order to provide a better understanding of the effects of regulation on the magnitude and duration of Missouri River flooding in 2011, the U. S. Geological Survey (USGS) constructed and calibrated a watershed model to simulate flows without the effects of regulation.

## Purpose and Scope

This report documents the construction and calibration of a precipitation-runoff model of the Missouri River Basin. Model-simulated unregulated flows during the 2011 water year (October 1, 2010 through September 31, 2011) were compared with measured regulated flows during the same period to quantify the effects of regulation on flood flows. A comparison of simulated peak discharges with and without regulation is presented for selected locations along the Missouri River, from near Landusky, Montana to Saint Charles, Missouri, near the confluence of the Missouri and Mississippi Rivers (fig. 2). Simulated unregulated peak discharges for 2011 also are compared with historical peak discharges for the 1952 flood. Finally, a comparison of the duration of 2011 simulated and measured flows that exceeded National Weather Service flood-stage thresholds, at selected locations, is presented.

## Modeling Methods and Techniques

The Precipitation-Runoff Modeling System (PRMS) is a modular, distributed parameter, physical-process watershed model constructed to evaluate the effects of various combinations of precipitation, climate, and land use on surface-water runoff (Markstrom and others, 2008). The hydrologic system is simulated by PRMS with known physical laws and empirical relations derived from watershed characteristics (Markstrom and others, 2008), and PRMS is designed to account for


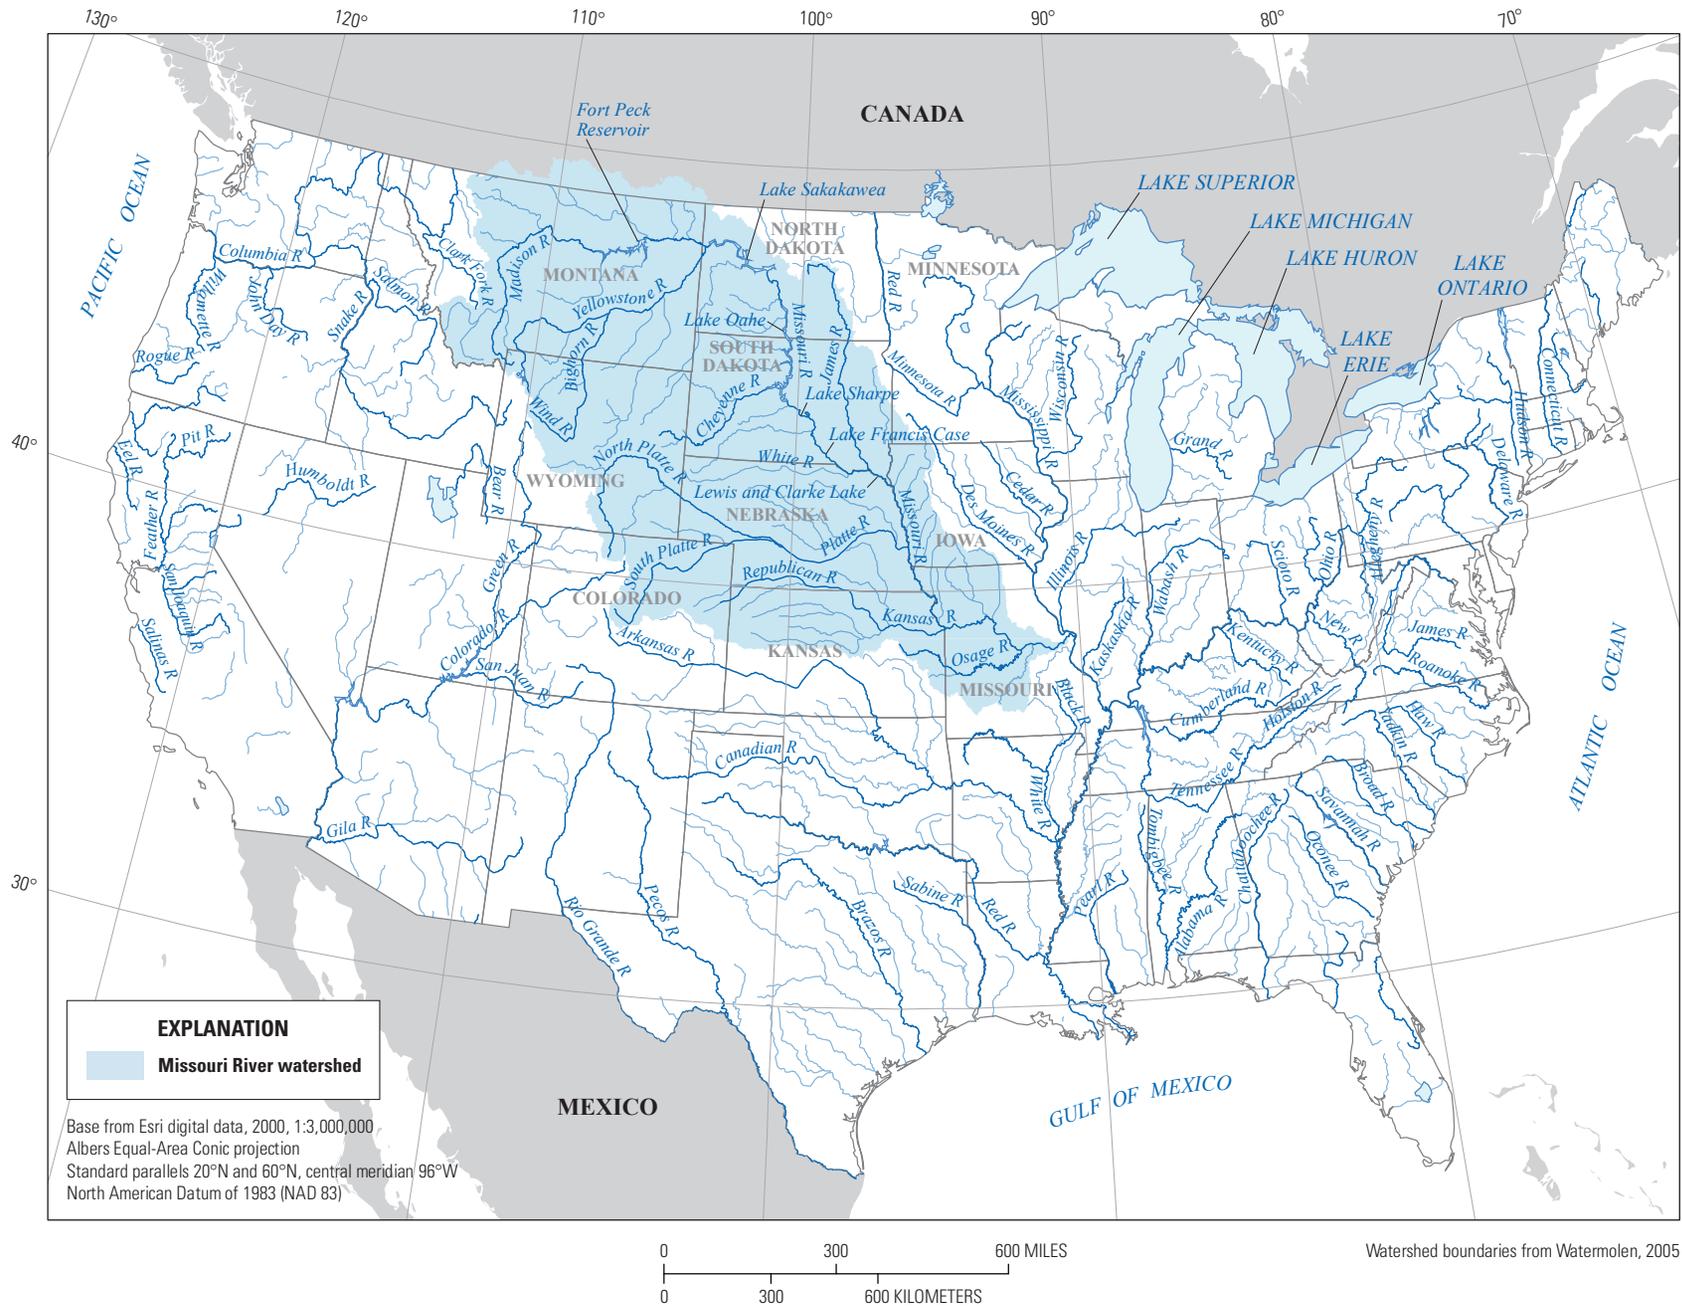


Figure 1. Location of Missouri River Basin.



**Figure 2.** Location of U.S. Army Corps of Engineers (USACE) major dams along the Missouri River.

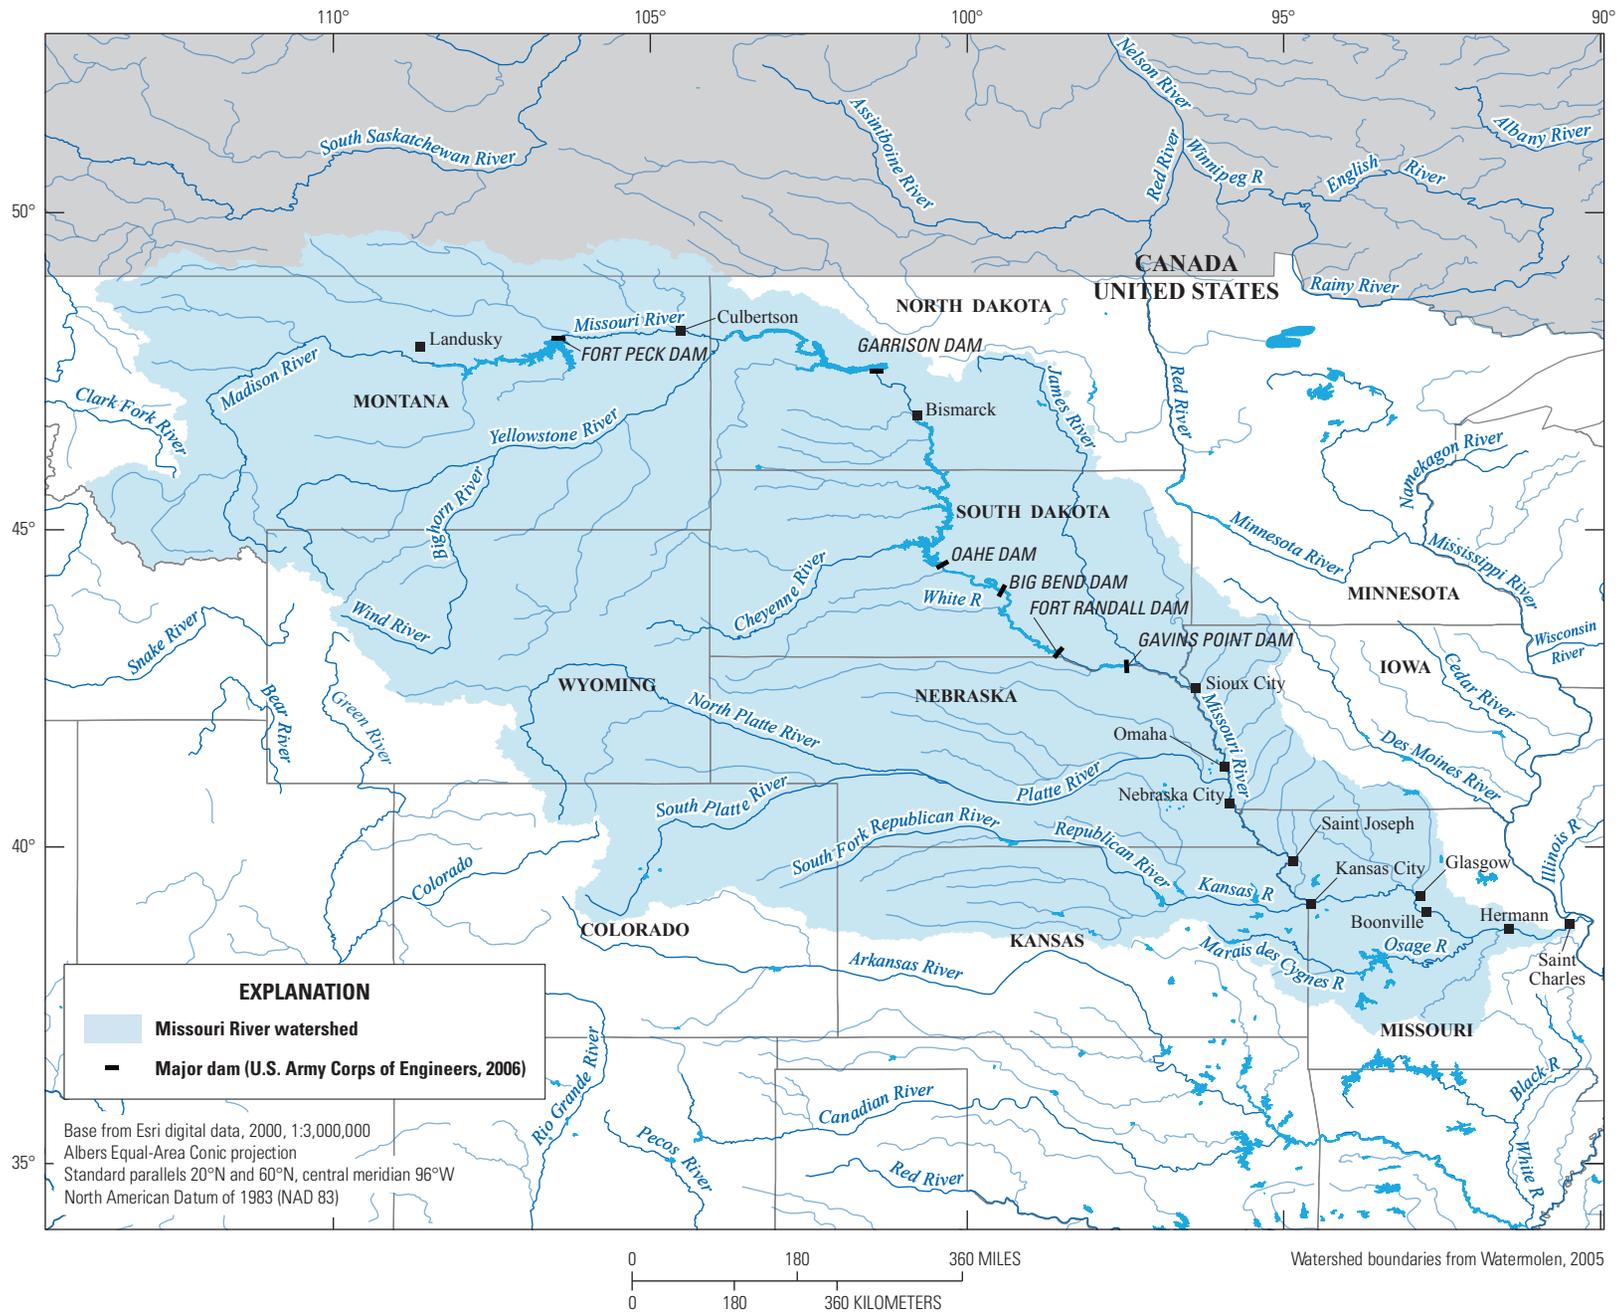

spatially distributed watershed features and characteristics. A schematic diagram (fig. 3) shows how a typical PRMS model uses climate inputs to simulate watershed hydrology.

In PRMS, a watershed, or drainage basin (basin), is divided into a series of contiguous spatial units called hydrologic response units (HRUs) and these are based on hydrologic and physical characteristics such as land surface altitude, slope, aspect, plant type and cover, land use, soil morphology, geology, drainage boundaries, distribution of precipitation, temperature, solar radiation, and flow direction (Markstrom and others, 2008). HRUs receive and produce streamflow from and to each other, and to the drainage network consisting of stream segments (Goode and others, 2010). Each HRU is considered homogenous with respect to hydrologic and physical characteristics and to its hydrologic response. Energy and a water balance are computed by PRMS daily for each HRU (Markstrom and others, 2008).

The Missouri River PRMS model (Missouri River model) constructed for this report is a coarse-resolution model based on the Geospatial Fabric (GF) (Viger, 2012, 2014) to align with the USGS National Research Program (NRP) National Hydrologic Model specifications outlined in section “Delineation and Parameterization of Spatial Features” (Viger, 2012). The Missouri River model contains 18,897 HRUs and 9,468 stream segments and was divided at dam and streamgage locations into 16 subbasin models for calibration (figs. 4 and 5). Model calibration was completed using the Luca (Let us calibrate) software: a multiple-objective, stepwise, automated procedure for hydrologic model calibration (Hay and Umemoto, 2006).

## Delineation and Parameterization of Spatial Features


For the Missouri River model, a preliminary version of the GF was used to aggregate the catchments and flow lines defined in the National Hydrography Dataset Plus dataset (NHDPlus) (Horizon Systems Corporation, 2006) into HRUs and stream segments that were relevant for modeling at the regional scale. The GF uses methods that were established in the Geographical Information Systems (GIS) Weasel software (Viger and Leavesley, 2007) to determine HRU and segment parameters. These methods are currently being revised and used to create a national database that aggregates parameters that characterize the physical features of the watersheds in the United States. This database is referred to as the GF for National Hydrologic Modeling (Viger, 2012, 2014).

Spatial features were delineated by first identifying all points of interest (POIs) on the 1:100,000 scale NHDPlus network. The POIs include USGS streamgages with a record of a guaranteed minimum quality (Falcone, 2011), the set of locations to which the National Weather Service River Forecast Centers forecast flood stage (URL accessed October 24, 2013, <http://water.weather.gov/ahps/>), and the set of

nodes used by the USGS National Water Quality Assessment Program’s SPARROW modeling project (Schwarz and others, 2006; Brown and others, 2011). The POIs also are located at where downstream NHDPlus flow lines attain a level equal to or greater than a Strahler order of 5 (Strahler, 1952) and where flow lines converge at inlets and outlets to water bodies exceeding 1 million acres. Other POIs were created to ensure the quality of the resultant network at tributary stream confluences with Strahler orders less than 5, and POIs were created where travel time (as set in NHDPlus dataset) between POIs exceeded 24 hours. In the Missouri River model, 9430 POIs were well-distributed throughout the watershed, approximately 10 miles apart. To maintain better similarity with the NHDPlus dataset, POIs were located at the downstream end of their associated NHDPlus flow lines. The slight increase in the contributing area was judged to be an acceptable source of error at this coarse scale.


Once the set of POIs was created, PRMS stream segments and HRU’s were defined (fig. 4). All NHDPlus flow lines and catchments were aggregated and assigned to the nearest downstream POI, thereby aggregating all NHDPlus catchments associated with a given POI into a single feature known as a local or “incremental” contributing area (ICA). A minimal set of NHDPlus flow lines needed to sufficiently create a continuous network between all POIs was then extracted. The flow lines in this subset were aggregated to a single PRMS routing segment for each POI. The HRUs were then created by splitting the ICA using the corresponding routing segment. In the case of headwater ICAs where the segment does not fully divide the ICA, the part of the ICA below the segment headwater was split and the contributing area above the segment headwater point was associated with the smaller of the two halves. Flow was routed through PRMS stream segments using the Muskingum routing method, where routing segment length,  $x$ , and travel time,  $k$ , parameters are determined from the NHDPlus flow line attributes (Markstrom, 2008).

A geospatial database was created containing parameters that characterize the physical features of the basin and the stream segments. The database contains layers generated from NHDPlus data, National Land Cover Data Base, Percent Impervious, U.S. Forest types, U.S. Forest Density, U.S. Permeability, State Soil Geographic Database (STATSGO), and general soil maps (Homer and others, 2007; U.S. Department of Agriculture, 1994; Gleeson and others, 2011; U.S. Geological Survey, 2012; Wolock, 1997). The layers were reclassified to conform to the code scheme defined in the GIS Weasel User’s Manual (Viger and Leavesley, 2007). These and other data were then processed using software developed as part of this project that replicated the GIS Weasel parameterization methodologies created for PRMS, creating the final GF. The GF data were then used to characterize the physical features of the Missouri River model’s HRU and segment input parameters.

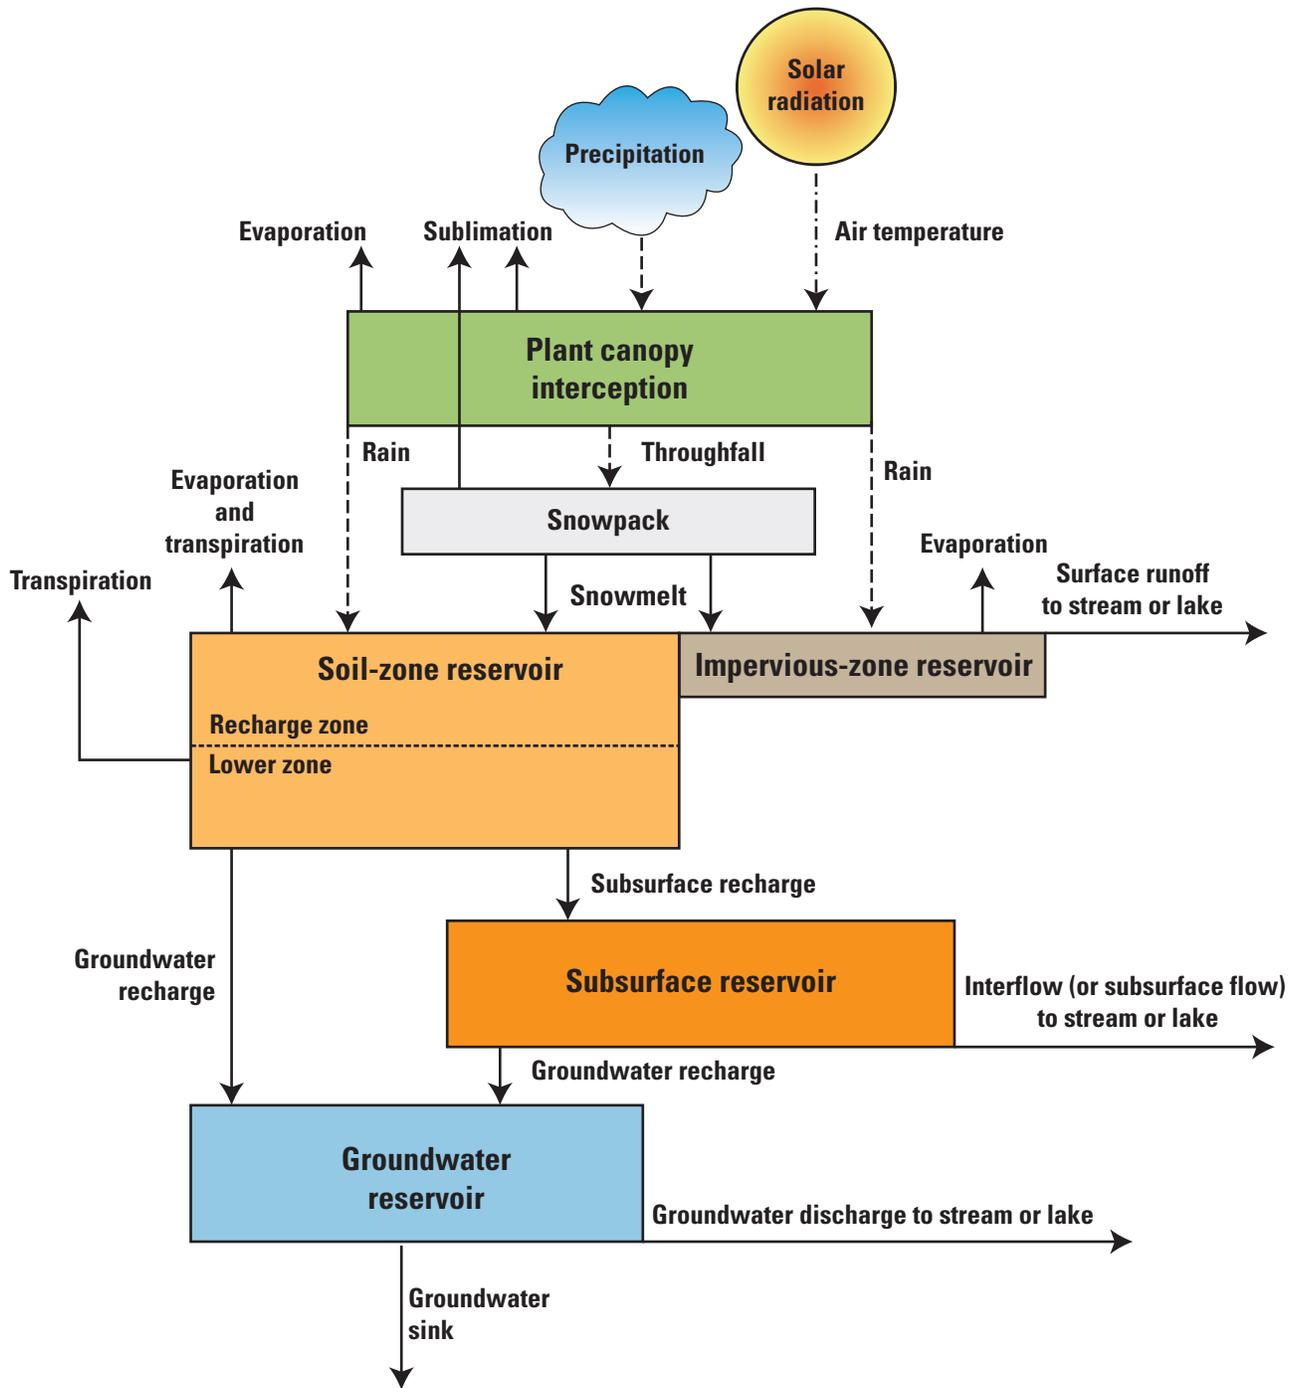

Modified from Markstrom and others, 2008

**Figure 3.** Schematic diagram of a watershed and its meteorological inputs (precipitation, air temperature, and solar radiation) simulated by the Precipitation-Runoff Modeling System (PRMS).

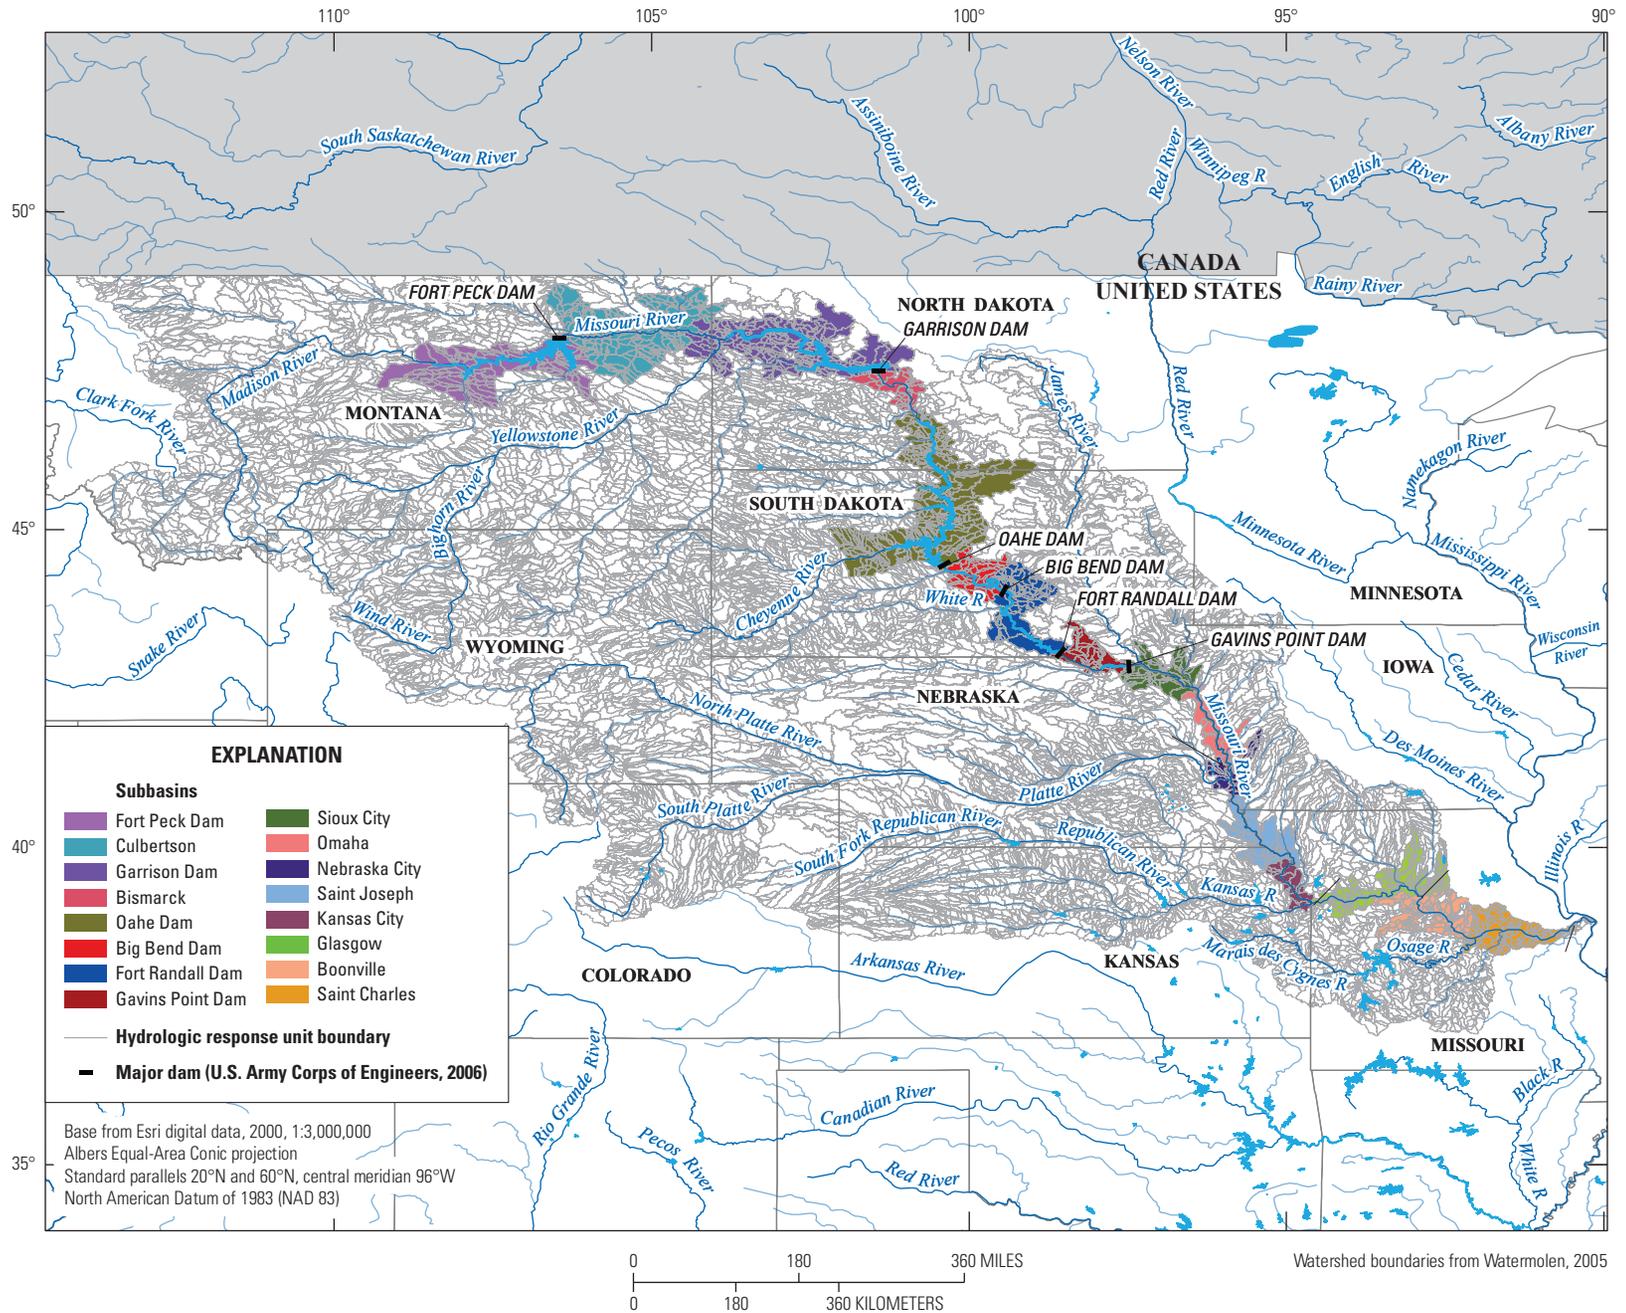

**Figure 4.** Subbasins and Hydrologic response units (HRUs) in the Missouri River Precipitation-Runoff Modeling System model.

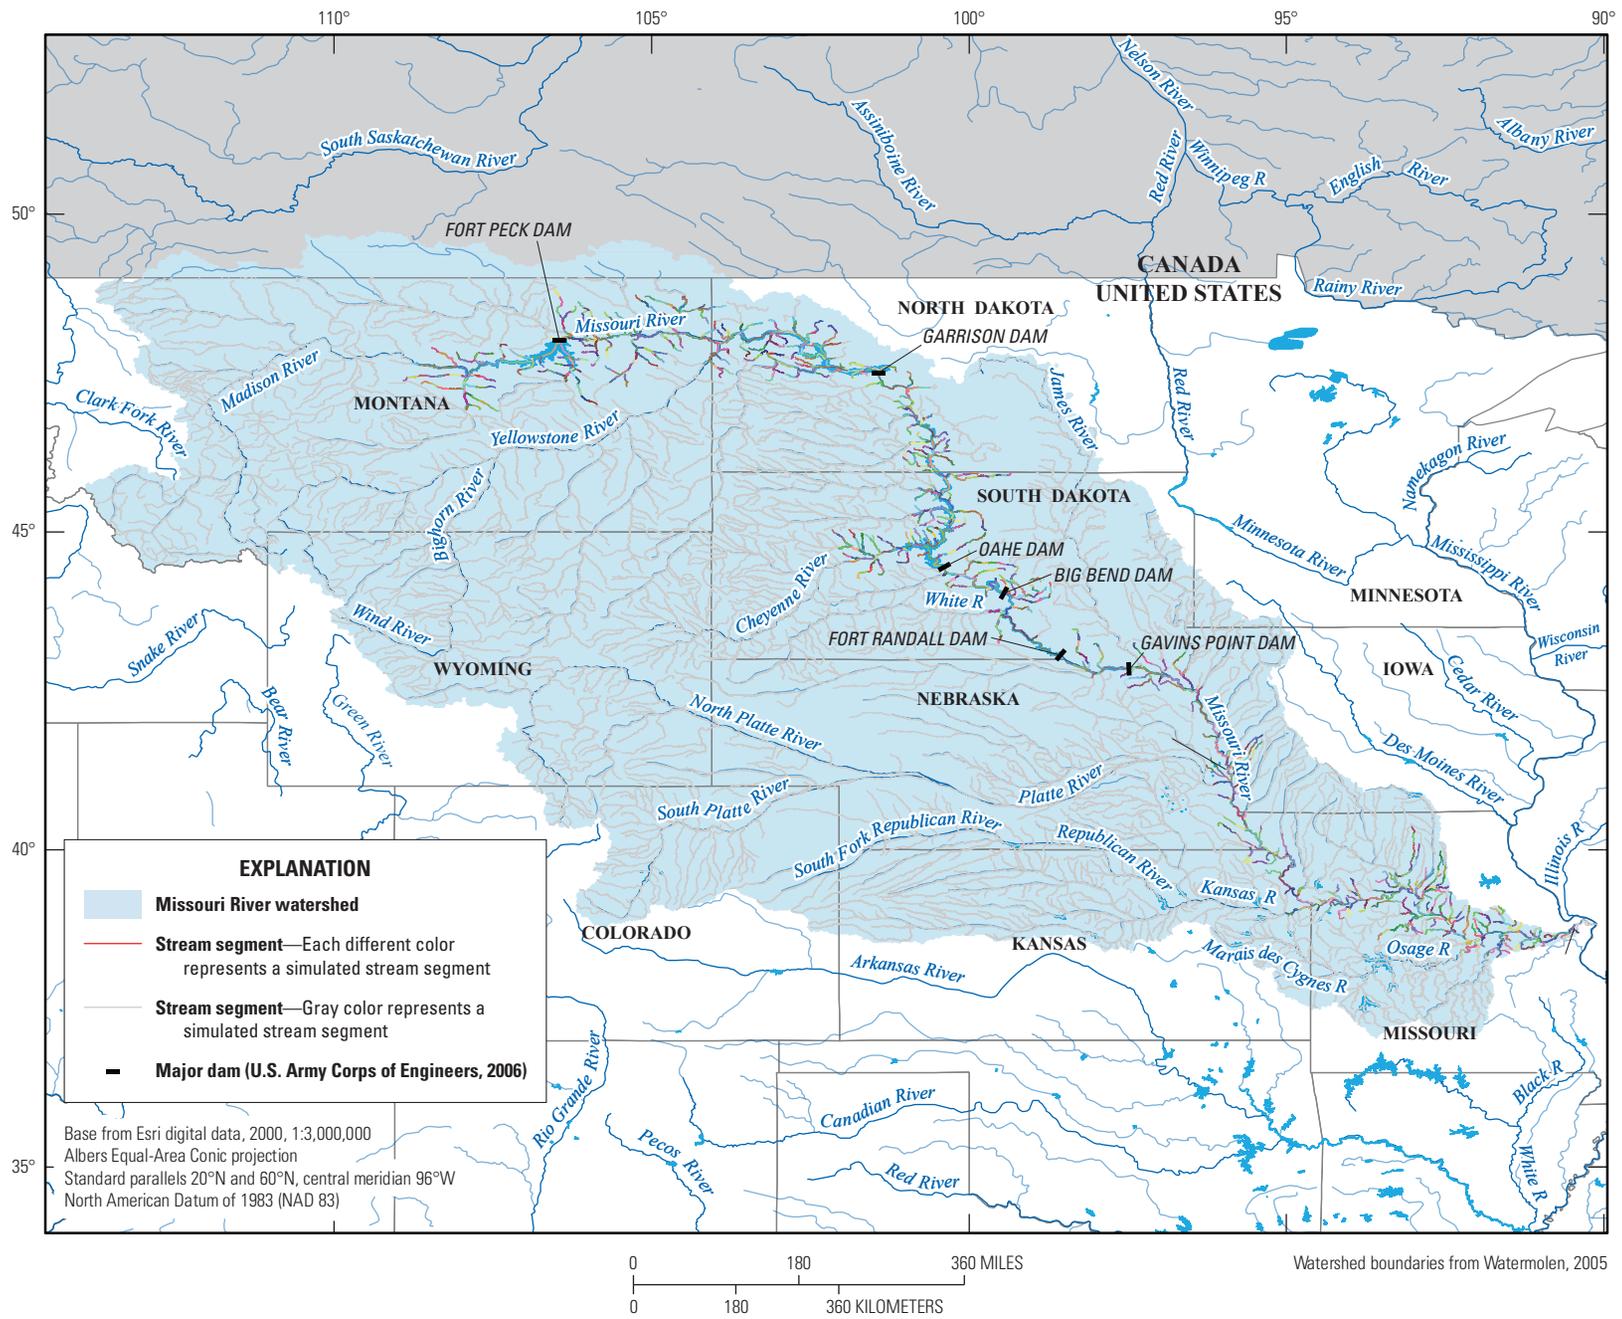


Figure 5. Stream segments for the Precipitation-Runoff Modeling System (PRMS) representation of the hydrologic system.

## Precipitation-Runoff Modeling System (PRMS) Input Data

Precipitation, minimum temperature, and maximum temperature were used in the Missouri River model as the main climatic drivers. Daily Surface Weather and Climatological Summaries (DAYMET) were acquired (Thornton and others, 2012) for October 1, 1999 to September 30, 2011, and post-processed by the USGS Center for Integrated Data Analytics (CIDA) to provide 12 years of input data at a 1-kilometer grid for the Missouri River model construction and calibration. DAYMET data were spatially averaged for each HRU and downloaded using the USGS geodata portal (Blodgett, 2013).

In addition to meteorological inputs, PRMS can also use streamgage data as inflow to the model. Streamgage data are especially useful where tributary inflows are affected heavily by the operation of upstream dams and reservoirs. The Missouri River model used streamgage data as input at streamgages on major tributary streams upstream from their confluence with the Missouri River for calibration and simulation to accurately account for effects of dams and reservoirs in tributary stream channels, inflows to and outflows from the Reservoir System, and flows between subbasin models. The location of 100 selected streamgages that provided model input data for historical stream flows, releases from reservoirs, tributary inflows, and measured streamflows for calibration are listed in table 1 and shown in figure 6.

USGS streamgage data were collected using the USGS Downsizer program (Ward-Garrison and others, 2009). The Downsizer program selects, downloads, verifies, and formats streamflow, or other available time-series data, for PRMS and other environmental modeling programs. The Downsizer program accessed the USGS National Water Information System (USGS NWIS) and was used to retrieve daily streamflow measurements at 100 sites for October 1, 1999, to September 30, 2011 (U.S. Geological Survey, 2013). Daily reservoir release data also were included in the model for all Reservoir System dams for that period (U.S. Army Corps of Engineers, 2006; K. Grode, U.S. Army Corps of Engineers, written commun., 2012).

## Surface-Water Model Calibration

Because of the large input datasets and extended run time of a singular model for the Missouri River Basin, the basin was divided into 16 subbasin models: Fort Peck Dam, Culbertson, Garrison Dam, Bismarck, Oahe Dam, Big Bend Dam, Fort Randall Dam, Gavins Point Dam, Sioux City, Omaha, Nebraska City, Saint Joseph, Kansas City, Glasgow, Boonville, and Saint Charles (fig. 4). Subbasin models are generally named after their calibration points, which are typically their outlets, except in the case of the Boonville subbasin model which outlets at Jefferson City, Missouri. Model calibration for parameters listed in table 2 began at the headwaters and

proceeded through the basin to the confluence of the Missouri and Mississippi Rivers.

For the eight subbasin models upstream of Gavins Point Dam (Fort Peck Dam, Culbertson, Garrison Dam, Bismarck, Oahe Dam, Big Bend Dam, Fort Randall Dam, and Gavins Point Dam), each model was calibrated to naturalized flow records (U.S. Army Corps of Engineers, 2006; K. Grode, U.S. Army Corps of Engineers, written commun., 2012) at dams and at subbasin outlets (fig. 7A-H). Naturalized flow data, which represent unregulated flow, are available to the public upon request for the Missouri River at Fort Peck Garrison, Oahe, Big Bend, Fort Randall, and Gavins Point dams, at three inter-reach locations (Culbertson, Montana; Wolf Point, Montana; and Bismarck, North Dakota) and at seven locations downstream of Gavins Point Dam (Yankton, South Dakota; Sioux City, Iowa; Decatur, Nebraska; Omaha, Nebraska; Nebraska City, Nebraska, Rulo, Nebraska and Saint Joseph, Missouri). Naturalized flows were calculated by the Missouri River Basin Water Management Division (MRBWMD) of the Northwestern Division, USACE, using a legacy software program written in FORTRAN (J. Knofczynski, U.S. Army Corps of Engineers, written commun., 2014). The program used input data from fifteen U.S. Bureau of Reclamation (USBR) reservoirs; fourteen of which are located on tributaries to the Missouri River. Input data included USBR and USACE reservoir area-capacity tables, simple routing reaches, depletions for Reservoir System dams, reservoir inflows and outflows, monthly reservoir storage changes, precipitation and evaporation data for all reservoirs, and streamflow from streamgages (J. Knofczynski, U.S. Army Corps of Engineers, written commun., 2014). The eight remaining subbasin models (Sioux City, Omaha, Nebraska City, Saint Joseph, Kansas City, Glasgow, Boonville, and Saint Charles) were calibrated to measured flows (USGS streamgages: see table 1; fig. 6; fig 7I-P).

Subbasin model calibration was completed in a stepwise fashion from headwaters to the mouth, where each model was calibrated using tributary streamgage data and output from the upstream subbasin model as input, where applicable. Tributary flows upstream from inflow streamgages were not simulated in the Missouri River model (fig. 5). Climate and streamflow data for October 1, 1999, to September 30, 2011, were used to construct the model and ensure antecedent conditions were attained in the basin prior to the 2011 flood. The period of calibration was restricted to October 1, 2001 to September 30, 2011 to optimize model simulation of 2011 flows; because of the targeted application of the model, no validation period was completed. The USGS software package, Luca, was used to complete an automated, stepwise, multiple-objective calibration of climate and streamflow related parameters for each subbasin model at a daily time step (Hay and Umemoto, 2006). Emphasis was placed during calibration on matching model simulated daily streamflows with measured daily streamflows during high-flow periods.

**Table 1.** U.S. Geological Survey (USGS) streamgages used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.

[USGS, U.S. Geological Survey; latitude and longitude in decimal degrees; mi<sup>2</sup>, square miles, NGVD 29, National Geodetic Vertical Datum of 1929; na, not available]

Map number (fig. 6)	USGS streamgage number	USGS streamgage name	Latitude (north)	Longitude (west)	Drainage area measured at gage (mi <sup>2</sup> )	Elevation (feet above NGVD 29)
1	06115200	Missouri River near Landusky, Montana	47.631	-108.688	40,987	7,349
2	06130500	Musselshell River at Mosby, Montana	46.995	-107.889	7,846	8,182
3	06131000	Big Dry Creek near Van Norman, Montana	47.349	-106.358	2,554	7,644
4	06131200	Nelson Creek near Van Norman, Montana	47.537	-106.153	100	7,546
5	06132000	Missouri River below Fort Peck Dam, Montana	48.044	-106.356	57,556	6,621
6	06174500	Milk River at Nashua, Montana	48.130	-106.364	22,332	6,653
7	06177500	Redwater River at Circle, Montana	47.414	-105.576	547	7,855
8	06181000	Poplar River near Poplar, Montana	48.171	-105.179	3,174	6,408
9	06183450	Big Muddy Creek near Antelope, Montana	48.673	-104.512	967	6,562
10	06185500	Missouri River near Culbertson, Montana <sup>1</sup>	48.124	-104.473	88,386	1,883
11	06329500	Yellowstone River near Sidney, Montana	47.677	-104.155	69,083	6,172
12	06329597	Charbonneau Creek near Charbonneau, North Dakota	47.851	-103.794	149	6,529
13	06331000	Little Muddy River below Cow Creek near Williston, North Dakota	48.284	-103.573	875	6,113
14	06332000	White Earth River at White Earth, North Dakota	48.376	-102.767	780	6,791
15	06332515	Bear Den Creek near Mandaree, North Dakota	47.787	-102.769	74	6,390
16	06332523	East Fork Shell Creek near Parshall, North Dakota	47.949	-102.215	360	6,201
17	06332770	Deepwater Creek at mouth near Raub, North Dakota	47.738	-102.108	220	6,010
18	06337000	Little Missouri River near Watford City, North Dakota	47.590	-103.252	8,310	6,329
19	06338490	Missouri River at Garrison Dam, North Dakota	47.502	-101.431	181,400	na
20	06339000	Missouri River below Garrison Dam, North Dakota <sup>1</sup>	47.386	-101.393	181,400	5,249
21	06340500	Knife River at Hazen, North Dakota	47.285	-101.622	2,240	5,618
22	06341800	Painted Woods Creek near Wilton, North Dakota	47.275	-100.792	427	5,790
23	06342260	Square Butte Creek below Center, North Dakota	47.057	-101.196	146	6,119
24	06342450	Burnt Creek near Bismarck, North Dakota	46.915	-100.814	108	5,538
25	06342500	Missouri River at Bismarck, North Dakota <sup>1</sup>	46.814	-100.821	186,400	1,618
26	06349000	Heart River near Mandan, North Dakota	46.834	-100.975	3,310	5,376
27	06349500	Apple Creek near Menoken, North Dakota	46.794	-100.657	1,680	5,376
28	06349600	Hay Creek at Main Avenue in Bismarck, North Dakota	46.807	-100.734	31	5,416
29	06354000	Cannonball River at Breien, North Dakota	46.376	-100.934	4,100	5,491
30	06354580	Beaver Creek at Linton, North Dakota	46.269	-100.253	717	5,519
31	06354882	Oak Creek near Wakpala, South Dakota	45.712	-100.559	354	5,545
32	06357800	Grand River at Little Eagle, South Dakota	45.658	-100.818	5,322	5,330
33	06360500	Moreau River near Whitehorse, South Dakota	45.256	-100.843	4,894	5,451
34	06438500	Cheyenne River near Plainview, South Dakota	44.529	-101.930	21,425	6,065
35	06439000	Cherry Creek near Plainview, South Dakota	44.743	-102.054	1,190	7,080
36	06440000	Missouri River at Pierre, South Dakota <sup>1</sup>	44.373	-100.368	243,500	4,640
37	06441500	Bad River near Fort Pierre, South Dakota	44.327	-100.384	3,147	4,684
38	06442000	Medicine Knoll Creek near Blunt, South Dakota	44.563	-99.914	440	5,286
39	06442500	Medicine Creek at Kennebec, South Dakota	43.905	-99.876	446	5,445

**Table 1.** U.S. Geological Survey (USGS) streamgages used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.—Continued

[USGS, U.S. Geological Survey; latitude and longitude in decimal degrees; mi<sup>2</sup>, square miles, NGVD29, National Geodetic Vertical Datum of 1929; na, not available]

Map number (fig. 6)	USGS streamgage number	USGS streamgage name	Latitude (north)	Longitude (west)	Drainage area measured at gage (mi <sup>2</sup> )	Elevation (feet above NGVD 29)
40	06443000	Missouri River at Chamberlain, South Dakota <sup>1</sup>	43.811	-99.336	na	4,331
41	06452000	White River near Oacoma, South Dakota	43.748	-99.556	9,920	4,519
42	06452320	Platte Creek near Platte, South Dakota	43.327	-98.971	747	4,495
43	06467500	Missouri River at Yankton, South Dakota <sup>1</sup>	42.866	97.394	279,500	3,739
44	06478513	James River near Yankton, South Dakota	42.996	-97.370	20,947	3,784
45	06479010	Vermillion River near Vermillion, South Dakota	42.817	-96.924	2,253	3,691
46	06485500	Big Sioux River at Akron, Iowa	42.838	-96.562	7,879	3,671
47	06486000	Missouri River at Sioux City, Iowa <sup>2</sup>	42.486	-96.414	314,600	3,468
48	06600000	Perry Creek at 38th Street at Sioux City, Iowa	42.535	-96.411	65	3,648
49	06600500	Floyd River at James, Iowa	42.577	-96.311	886	3,585
50	06601000	Omaha Creek at Homer, Nebraska	42.322	-96.488	174	3,545
51	06602400	Monona-Harrison Ditch near Turin, Iowa	41.964	-95.992	900	3,330
52	06607500	Little Sioux River near Turin, Iowa	41.964	-95.973	3,526	3,346
53	06608500	Soldier River at Pisgah, Iowa	41.831	-95.931	407	3,401
54	06609500	Boyer River at Logan, Iowa	41.642	-95.782	871	3,312
55	06610000	Missouri River at Omaha, Nebraska <sup>2</sup>	41.259	-95.923	322,800	3,111
56	06610732	Big Papillion Creek at Fort Street at Omaha, Nebraska	41.307	-96.104	129	3,374
57	06805500	Platte River at Louisville, Nebraska	41.015	-96.158	85,370	3,304
58	06806500	Weeping Water Creek at Union, Nebraska	40.794	-95.911	241	3,040
59	06807000	Missouri River at Nebraska City, Nebraska <sup>2</sup>	40.682	-95.847	410,000	2,970
60	06810000	Nishnabotna River above Hamburg, Iowa	40.602	-95.645	2,806	2,934
61	06811500	Little Nemaha River at Auburn, Nebraska	40.393	-95.813	792	2,920
62	06813000	Tarkio River at Fairfax, Missouri	40.339	-95.406	508	2,847
63	06815000	Big Nemaha River at Falls City, Nebraska	40.036	-95.596	1,339	2,816
64	06817700	Nodaway River near Graham, Missouri	40.202	-95.070	1,520	2,796
65	06818000	Missouri River at Saint Joseph, Missouri <sup>2</sup>	39.753	-94.857	426,500	2,589
66	06821190	Platte River at Sharps Station, Missouri	39.401	-94.727	2,380	2,475
67	06892350	Kansas River at Desoto, Kansas	38.983	-94.965	59,756	2,473
68	06892360	Kill Creek at 95th Street near Desoto, Kansas	38.957	-94.974	53	2,513
69	06892495	Cedar Creek near Desoto, Kansas	38.978	-94.923	58	2,297
70	06892513	Mill Creek at Johnson Drive, Shawne, Kansas	39.029	-94.817	58	2,297
71	06893000	Missouri River at Kansas City, Missouri <sup>2</sup>	39.112	-94.588	484,100	2,319
72	06893578	Blue River at Stadium Drive in Kansas City, Missouri	39.058	-94.512	256	2,357
73	06894000	Little Blue River near Lake City, Missouri	39.101	-94.301	184	2,362
74	06894200	Fishing River above Mosby, Missouri	39.332	-94.337	44	2,559
75	06895000	Crooked River near Richmond, Missouri	39.333	-93.98	159	2,317
76	06896000	Wakenda Creek at Carrollton, Missouri	39.343	-93.486	256	2,104
77	06902000	Grand River near Sumner, Missouri	39.640	-93.274	6,880	2,071
78	06905500	Chariton River near Prairie Hill, Missouri	39.540	-92.791	1,870	2,074


**Table 1.** U.S. Geological Survey (USGS) streamgages used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.—Continued

[USGS, U.S. Geological Survey; latitude and longitude in decimal degrees; mi<sup>2</sup>, square miles, NGVD29, National Geodetic Vertical Datum of 1929; na, not available]

Map number (fig. 6)	USGS streamgage number	USGS streamgage name	Latitude (north)	Longitude (west)	Drainage area measured at gage (mi <sup>2</sup> )	Elevation (feet above NGVD 29)
79	06906000	Mussel Fork near Musselfork, Missouri	39.524	-92.950	267	2,097
80	06906200	East Fork Little Chariton River near Macon, Missouri	39.751	-92.519	112	2,433
81	06906500	Missouri River at Glasgow, Missouri <sup>2</sup>	39.222	-92.849	498,900	1,925
82	06906800	Lamine River near Otterville, Missouri	38.702	-92.979	543	2,142
83	06908000	Blackwater River at Blue Lick, Missouri	38.992	-93.197	1,120	1,948
84	06909000	Missouri River at Boonville, Missouri <sup>2</sup>	38.980	-92.745	500,700	1,856
85	06909500	Moniteau Creek near Fayette, Missouri	39.121	-92.567	75	1,995
86	06909950	Petite Saline Creek at Hwy U near Boonville, Missouri	38.917	-92.704	136	1,969
87	06910230	Hinkson Creek at Columbia, Missouri	38.928	-92.340	70	1,914
88	06910750	Moreau River near Jefferson City, Missouri	38.529	-92.192	561	1,784
89	06926510	Osage River below Saint Thomas, Missouri	38.421	-92.208	14,584	1,725
90	06927000	Maries River at Westphalia, Missouri	38.432	-91.989	257	1,781
91	06934000	Gasconade River near Rich Fountain, Missouri	38.389	-91.820	3,180	1,817
92	06934500	Missouri River at Hermann, Missouri	38.710	-91.439	522,500	1,580
93	06935770	Bonhomme Creek near Clarkson Valley, Missouri	38.658	-90.619	11	1,474
94	06935830	Caulks Creek at Chesterfield, Missouri	38.655	-90.595	17	1,489
95	06935890	Creve Coeur Creek near Creve Coeur, Missouri	38.683	-90.489	22	1,475
96	06935955	Fee Fee Creek near Bridgeton, Missouri	38.728	-90.447	12	1,483
97	06935965	Missouri River at Saint Charles, Missouri <sup>2</sup>	38.789	-90.471	524,000	1,357
98	06935980	Cowmire Creek at Bridgeton, Missouri	38.764	-90.433	4	1,524
99	06935997	Mill Creek near Florissant, Missouri	38.848	-90.286	2	1,418
100	06936475	Coldwater Creek near Black Jack, Missouri	38.818	-90.251	40	1,501

<sup>1</sup>Site used for historical streamflows.

<sup>2</sup>Site used in calibration of the Precipitation-Runoff Modeling System model.

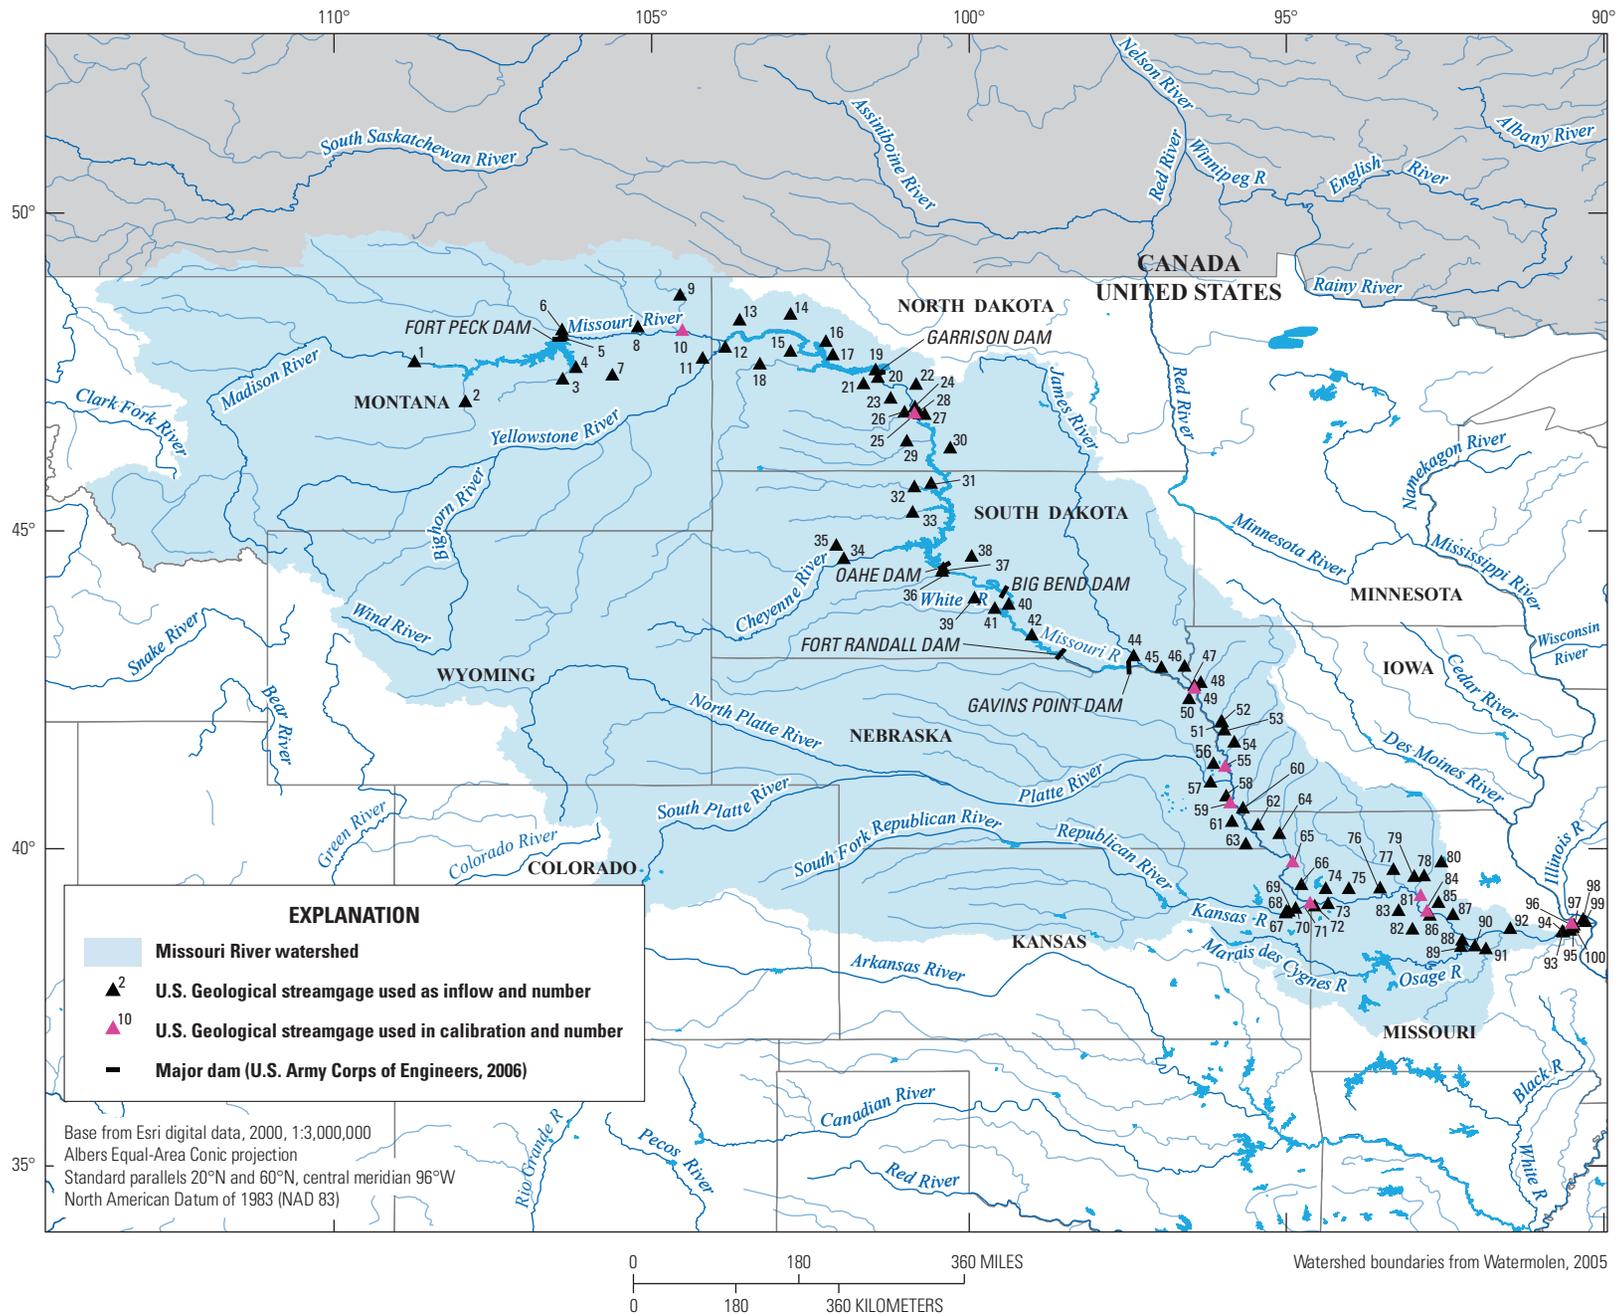

**Figure 6.** Location of U.S. Geological Survey (USGS) streamgages used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.

**Table 2.** Calibrated parameters and calibration steps used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.


[Dimensions: nmonth, number of months = 12; nhru = number of hydrologic response units (HRUs) = 18,897; nsegment, number of stream segments = 9,468; F, Fahrenheit; C, Celsius, GFV, values set in Geospatial Fabric]

Name	Description	Calibration step	Dimension	Units	Default value (range)
ddsolrad_hru_mo module					
dday_intcp_hru	Intercept in temperature cloud cover relationship	1	nhru x nmonth	unitless	1.83 (0 – 5)
dday_slope	Slope in temperature cloud cover relationship	1	nmonth	unitless	-0.13 (-0.5 – -0.01)
potet_jh_prms module					
jh_coef_hru_mo	HRU air temperature coefficient - Jensen-Haise	1	nhru x nmonths	degrees F	13 (5 – 20)
climate_hru prms module					
rain_cbh_adj_mo	Rain adjustment factor for each hru for each month	2	nhru x nmonths	decimal fraction	1 (0.6 – 1.4)
snow_cbh_adj_mo	Snow adjustment factor for each hru for each month	2	nhru x nmonths	decimal fraction	1 (0.6 – 1.4)
gwflow_casc prms module					
gwflow_coef	Groundwater routing coefficient	5	nhru	1/day	GFV (0.001 – 1)
climate_hru prms module					
adjmix_rain_hru_mo	Adjustment factor for rain in a rain/snow mix	3	nhru x nmonth	decimal fraction	1 (0.6 – 1.4)
tmax_allrain_hru	Precipitation all rain if HRU max temperature above this value	3	nhru x nmonth	temp units	32 (34 – 45)
tmax_allsnow_hru	Precipitation all snow if HRU max temperature below this value	3	nhru x nmonth	temp units	32 (30 – 40)
intcp_prms module					
potet_sublim_hru	Proportion of potential evapotranspiration that is sublimated from snow surface	3	nhru	decimal fraction	0.5 (0.1 – 0.75)
snowcomp prms module					
cecn_coef	Convection condensation energy coefficient	3	nmonth	calories per degree C above 0	5 (2 – 10)
emis_noppt_hru	Emissivity of air on days without precipitation	3	nhru	decimal fraction	0.757 (0.757 – 1)
freeh2o_cap_hru	Free-water holding capacity of snowpack	3	nhru	decimal fraction	0.05 (0.01 – 0.2)

**Table 2.** Calibrated parameters and calibration steps used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.—Continued


[Dimensions: nmonth, number of months = 12; nhru = number of hydrologic response units (HRUs) = 18,897; nsegment, number of stream segments = 9,468; F, Fahrenheit; C, Celsius, GFV, values set in Geospatial Fabric]

Name	Description	Calibration step	Dimension	Units	Default value (range)
soilzone prms module					
fastcoef_lin	Linear preferential-flow routing coefficient	4	nhru	1/day	GFV (0.001 – 0.8)
fastcoef_sq	Non-linear preferential-flow routing coefficient	6	nhru	unitless	0.8 (0.05 – 1)
pref_flow_den	Preferential-flow pore density	4	nhru	decimal fraction	0 (0 – 0.1)
sat_threshold	Water holding capacity of gravity and preferential flow reservoirs	4	nhru	inches	10 (1 – 15)
slowcoef_lin	Linear gravity-flow reservoir routing coefficient	3	nhru	1/day	GFV (0.001 – 0.5)
slowcoef_sq	Non-linear gravity-flow reservoir routing coefficient	6	nhru	unitless	0.1 (0.05 – 0.6)
soil_moist_max	Maximum value of water for soil zone	3	nhru	inches	GFV (2 – 10)
soil_rechr_max	Maximum value for soil recharge zone	3	nhru	inches	GFV (1.5 – 5)
soil2gw_max	Maximum value for soil water excess to groundwater	5	nhru	inches	GFV (0 – 0.5)
ssr2gw_rate	Coefficient to route water from subsurface to groundwater	5	nhru	1/day	GFV (0.05 – 0.8)
srunoff_smidx prms module					
smidx_coef	Coefficient in contributing area computations	4	nhru	decimal fraction	GFV (0.001 – 0.06)
smidx_exp	Exponent in contributing area computations	7	nhru	1/inch	0.3 (0.2 – 0.8)
muskingum prms module					
K_coef	Storage coefficient, in hours	7	nsegment	hours	GFV (0 – 24.0)

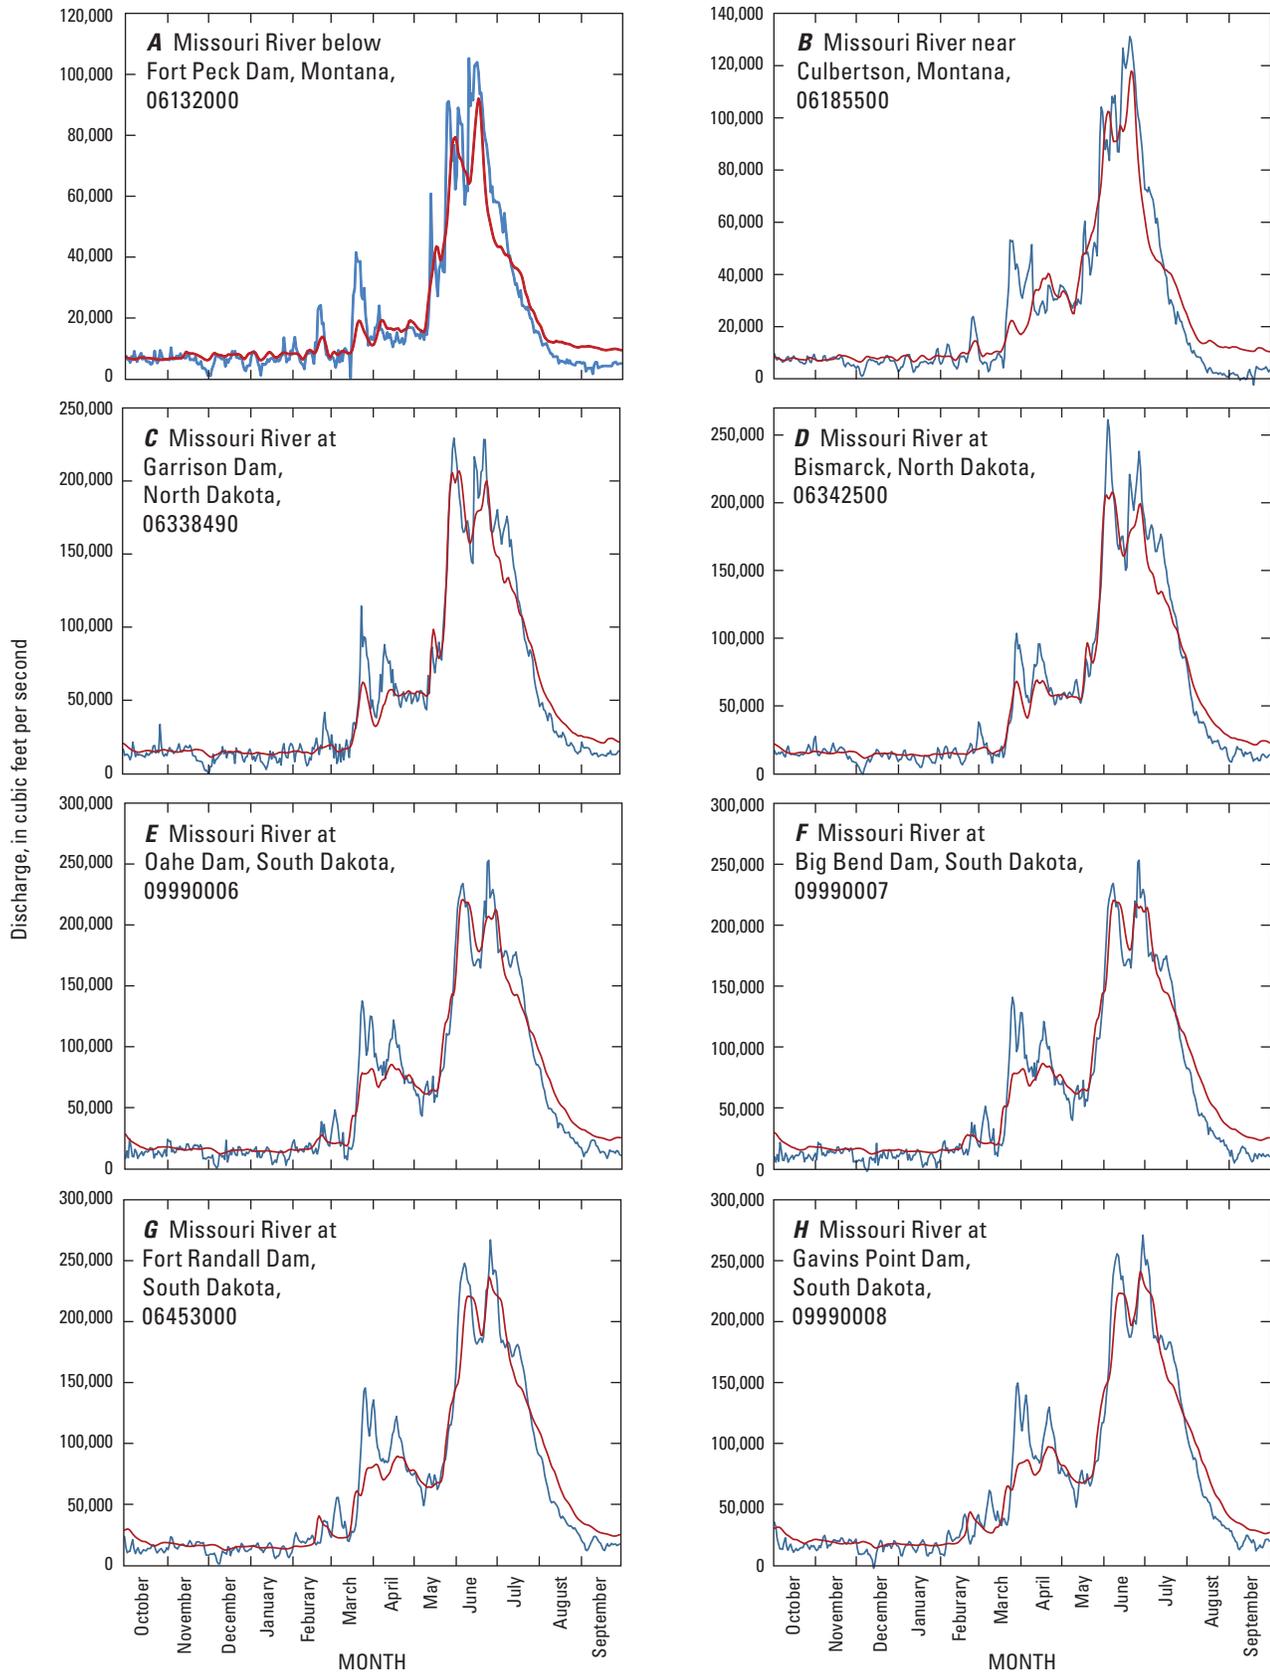

**Figure 7.** Daily mean streamflow simulated using the Missouri River Precipitation-Runoff Modeling System model as compared to calibration streamflow data sets (A-H, simulated unregulated streamflow and naturalized unregulated streamflow; I-P, simulated regulated streamflow and measured regulated streamflow) for selected locations on the Missouri River during 2011 water year.

**EXPLANATION**  
 — Simulated unregulated streamflow  
 — Naturalized unregulated streamflow

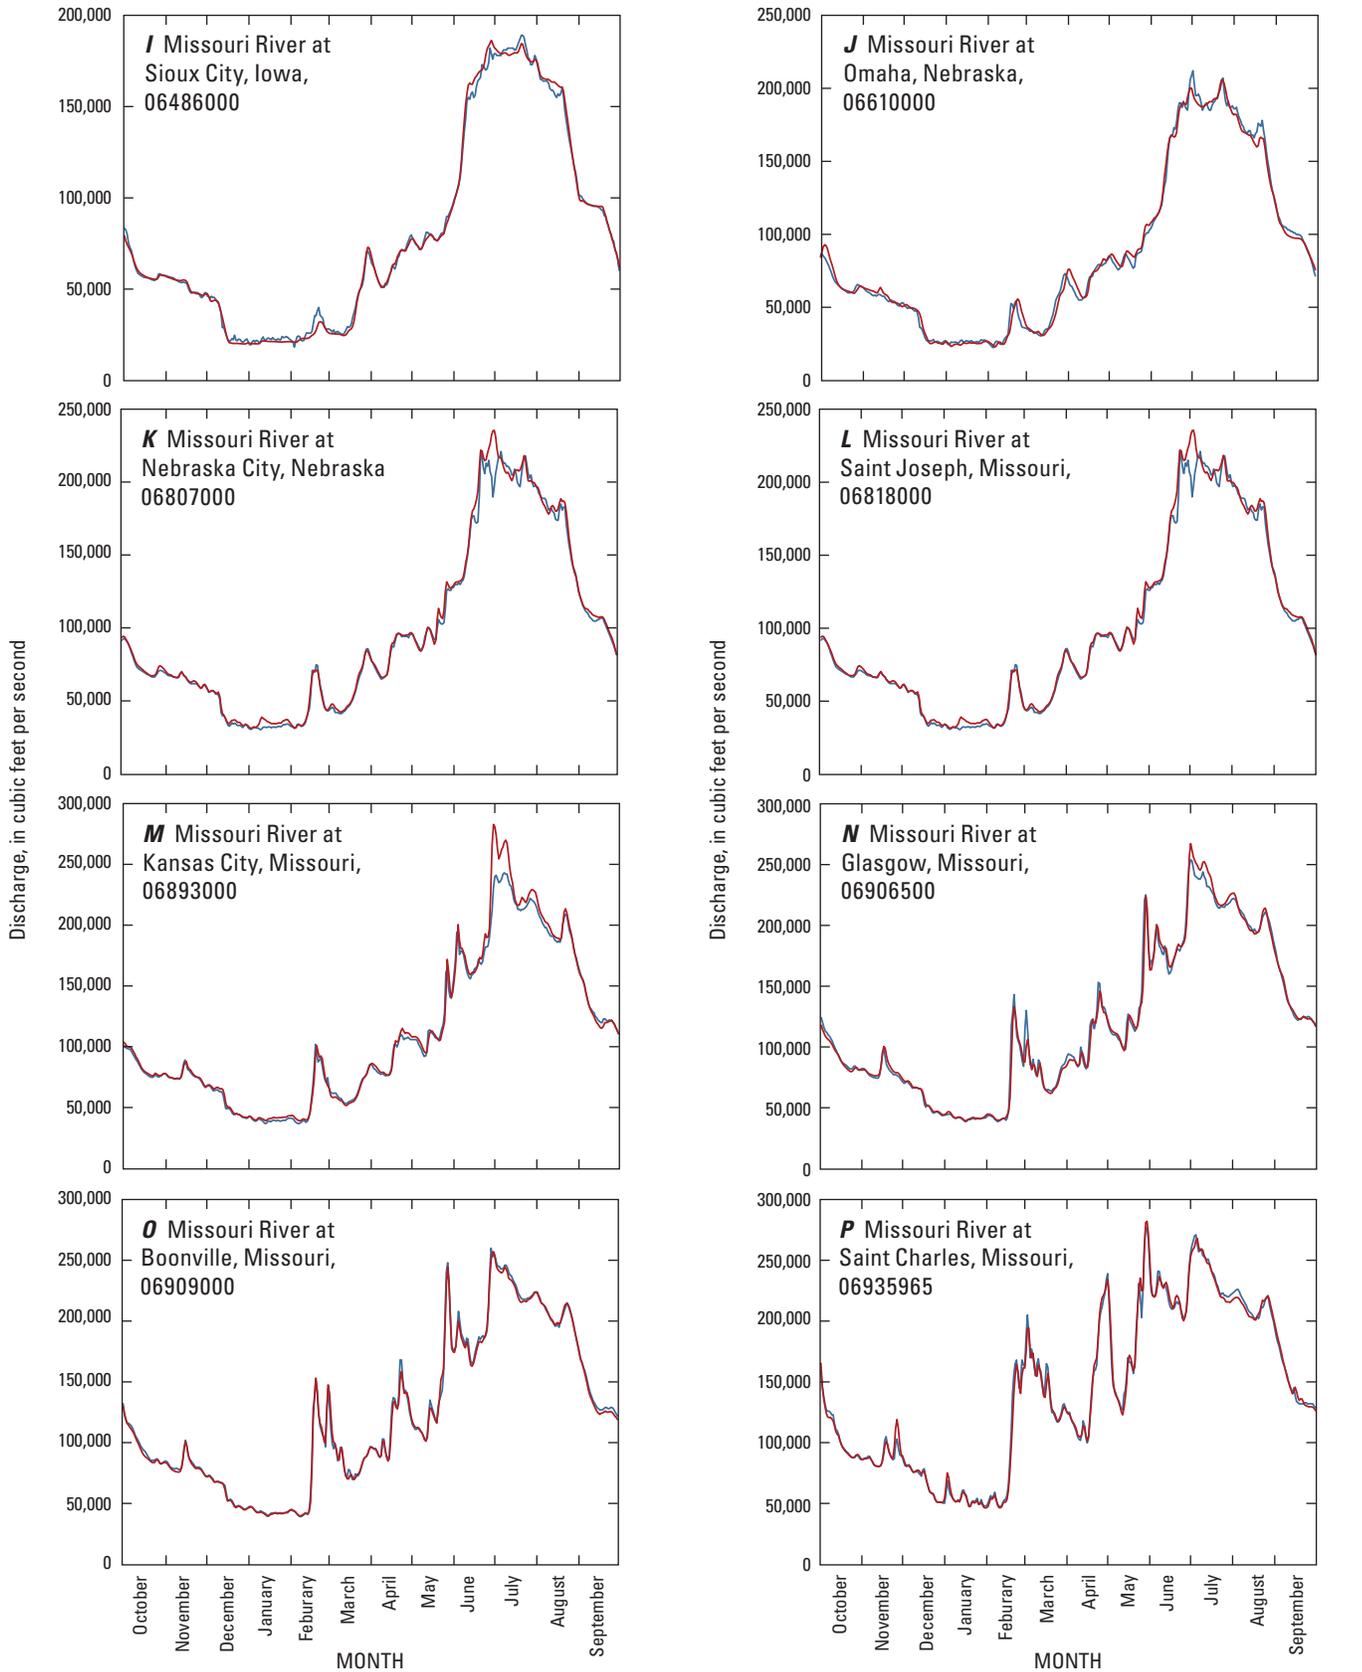

**Figure 7.** Daily mean streamflow simulated using the Missouri River Precipitation-Runoff Modeling System model as compared to calibration streamflow data sets (A-H, simulated unregulated streamflow and naturalized unregulated streamflow; I-P, simulated regulated streamflow and measured regulated streamflow) for selected locations on the Missouri River during 2011 water year.—Continued

**EXPLANATION**

- Simulated regulated streamflow
- Measured regulated streamflow

## Missouri River Model Performance

Statistical tests were used to assess how well the Missouri River model simulated flow during water year 2011. The percent bias (*PBIAS*), root mean square error-observation standard deviation ratio (*RSR*), Nash Sutcliffe efficiency (*NSE*), and coefficient of determination ( $R^2$ ) statistics (Moriassi and others, 2007; Singh and others, 2004; Nash and Sutcliffe, 1970) were used to evaluate model performance.

The *PBIAS* measures the average tendency of the simulated data to be larger or smaller than their observed counterparts (Gupta and others, 1999). A *PBIAS* value of 0.0 indicates ideal performance, whereas positive values indicate underestimation bias and negative values indicate overestimation bias (Moriassi and others, 2007). Model streamflow simulation is considered “very good” if the *PBIAS* is between 0 and plus or minus ( $\pm$ ) 10 percent, “good” if the *PBIAS* is between  $\pm$  10 and  $\pm$  15 percent, “satisfactory” if the *PBIAS* is between  $\pm$  15 and  $\pm$  25 percent, and “unsatisfactory” if the *PBIAS* is  $\pm$  25 percent and greater (Moraisi and others, 2007).

The *RSR* was developed to use the standard deviation of observations to qualify what is considered a low root mean square error for model performance (Singh and others, 2004). The *RSR* incorporates the benefits of error index statistics and includes a normalization/scaling factor. The *RSR* ranges from 0, which is an optimal value, to a large positive value, which means a poor fit (Singh and others, 2004). If *RSR* is between 0 and 0.5 then performance was “very good”, if *RSR* is between 0.5 and 0.6 then performance was “good”, *RSR* between 0.6 and 0.7 is “satisfactory”, and *RSR* greater than 0.7 is “unsatisfactory” (Moriassi and others, 2007).

The *NSE* is a normalized statistic that provides a measure of how well simulated values match measured datasets. The *NSE* values range from  $-\infty$  to 1. Values less than 0 indicate that the mean measured streamflow is a better predictor than simulated streamflows. A value of 0.0 indicates the simulated streamflow is as good as using the average value of all the measured data, and a value of 1 indicates a perfect fit between measured and simulated values. Moriassi and others (2007) suggest that a *NSE* of greater than 0.50 is satisfactory for streamflows simulated using models such as PRMS.

The  $R^2$  evaluates how accurately the simulated model results track the variability in the measured data that is explained by the simulated output. The  $R^2$  can reveal the strength of the linear relation between the predicted and the measured values. It can range between 0 and 1, and the closer the value is to 1 the better the linear correlation between simulated and measured values (Kalin and Hantush, 2006). For hydrologic modeling, values above 0.5 are considered to be satisfactory (Gassman and others, 2007).

The statistics *PBIAS*, *RSR*, *NSE*, and  $R^2$  are defined as:

$$PBIAS = \left[ \frac{\sum_{i=1}^n (Q_{obs,i} - Q_{sim,i})}{\sum_{i=1}^n (Q_{obs,i})} \right] * 100 \quad (1)$$

$$RSR = \frac{RSME}{STDEV_{obs}} = \frac{\left[ \sqrt{\sum_{i=0}^n (Q_{obs,i} - Q_{sim,i})^2} \right]}{\left[ \sqrt{\sum_{i=0}^n (Q_{obs,i} - \bar{Q}_{obs,i})^2} \right]} \quad (2)$$

$$NSE = 1 - \left[ \frac{\sum_{i=1}^n (Q_{obs,i} - Q_{sim,i})^2}{\sum_{i=1}^n (Q_{obs,i} - \bar{Q}_{obs,i})^2} \right] \quad (3)$$

$$R^2 = \frac{\left[ \sum_{i=0}^n (Q_{obs,i} - \bar{Q}_{obs,i})(Q_{sim,i} - \bar{Q}_{sim,i}) \right]^2}{\left[ \sum_{i=0}^n (Q_{obs,i} - \bar{Q}_{obs,i})^2 \right] \left[ \sum_{i=0}^n (Q_{sim,i} - \bar{Q}_{sim,i})^2 \right]} \quad (4)$$

where

- $Q_{obs,i}$  is the  $i$ th measurement for basin streamflow,
- $Q_{sim,i}$  is the  $i$ th simulated basin streamflow,
- $\bar{Q}_{obs,i}$  is the mean of the measured basin streamflow,
- $\bar{Q}_{sim,i}$  is the mean of the simulated basin streamflow,
- RMSE* is the root mean square error,
- STDEV<sub>obs</sub>* is the standard deviation of the observations,  
and
- $n$  is the total number of measurements.

Simulated regulated flows from the Missouri River model were evaluated at nine subbasin calibration points: Bismarck, North Dakota; Sioux City, Iowa; Omaha, Nebraska; Nebraska City, Nebraska; Saint Joseph, Missouri; Kansas City, Missouri; Glasgow, Missouri; Boonville, Missouri; and Saint Charles, Missouri, for the 2011 water year (table 1; fig. 2). The *PBIAS*, *RSR*, *NSE*, and  $R^2$  monthly and annual values for the 2011 water year are listed for each of these calibration sites (table 3). Based on statistical results, the Missouri River model is a good fit for annual streamflow estimation at all locations, with *PBIAS* and *RSR* ratings of very good and *NSE* and  $R^2$  ratings of satisfactory. Monthly statistics indicate a few unsatisfactory ratings, in particular, the months of January and July. These ratings, explained in detail below, may be attributed to the selected model calibration method (January), and the simplified approach for model construction (July).

The Missouri River model was calibrated with emphasis placed on the peak flow timing and volumes during high-flow months (April-August), and less emphasis during low-flow months (September-March), and, because of this, simulated flow peak timing and volumes during low-flow months may be less accurate. This may explain the unsatisfactory ratings of the model for January, as well as other low-flow months. Further calibration of the Missouri River model would likely improve simulations during low-flow months.

During the high-flow months of 2011, levees were breached and overtopped and, as a result, a large portion of flow through the adjacent channel was directed into the floodplain. The Missouri River model was not constructed to simulate this process of overbank storage, and therefore the model will overestimate flow downstream from an overtopping event. This phenomenon had taken place at many locations along the river, but was most pronounced in July 2011 at Kansas City, Missouri where upstream flooding directed a large portion of flow into the floodplain (fig. 8). Unsatisfactory ratings in calibration statistics for July are associated with these overbank storage events. Since the PRMS “does not account for overbank storage which occurs during high flood events” (R.S. Regan, U.S. Geological Survey, written commun., 2013), the statistical tests for months where these events occur are invalid, and may be omitted from results. Moreover, the model was designed to accurately simulate flows in the Missouri River without the effects of Reservoir System regulation, which includes the constructed and managed levees in the Missouri River floodplain.

## The Effects of Missouri River Mainstem Reservoir System Operations on 2011 Flooding

Determining the effects of regulation on 2011 flows was accomplished by: (1) performing model simulations of Missouri River flows that excluded the storage and routing operations of the Reservoir System; and (2) comparing model-simulated unregulated flow conditions (peaks and duration of high flows) to measured regulated flow conditions during 2011. The Missouri River model simulation began with the most upstream (Fort Peck Dam) subbasin model. Simulated flows at Fort Peck Dam were then routed as inflow to the next downstream subbasin model. This process was continued step-wise through the basin to the confluence of the Missouri River and Mississippi River. Hydrographs of simulated unregulated



**Figure 8.** Overbank storage near KCP&L Power Plant, Weston, Missouri, upstream from Kansas City, Missouri (streamgauge 06893000). View to south photographed on July 8, 2011. Photograph by Jeff Herzer (jeffherzer.com). Aircraft: Missouri State Highway Patrol, Sgt. Kevin G. Haywood, pilot.

flows and measured regulated flows are presented for dam and selected streamgauge locations on the Missouri River: Fort Peck Dam, Montana; Culbertson, Montana; Garrison Dam, North Dakota; Bismarck, North Dakota; Oahe Dam, South Dakota; Big Bend Dam, South Dakota; Fort Randall Dam, South Dakota; Gavins Point Dam, South Dakota; Sioux City, Iowa; Omaha, Nebraska; Nebraska City, Nebraska; Saint Joseph, Missouri; Boonville, Missouri; Kansas City, Missouri; Glasgow, Missouri; Boonville, Missouri; and Saint Charles, Missouri (fig. 9). Hydrographs plot average daily discharge values for measured and simulated flows in cubic feet per second ( $\text{ft}^3/\text{s}$ ).

### Comparison of Simulated (Unregulated) Flows and Measured (Regulated) Flows

Simulated daily average discharge (SDAD) and measured daily average discharge (MDAD) values, maximum SDAD and MDAD values, and spring and summer SDAD and MDAD peak flow values, are compared directly (magnitude comparison). Spring SDAD and MDAD peak flows are those peak flows that were either simulated or measured in February, March, and April, whereas summer SDAD and MDAD peak flows are those that were either simulated or measured in May, June, and July.

**Table 3.** Statistical test results for model performance at selected U.S. Geological Survey (USGS) streamgages used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.


[Water year (October 1, 2010 through September 31, 2011); *PBIAS*, percent bias; *RSR*, root mean square error-observation standard deviation ratio; *NSE*, Nash and Sutcliffe coefficient of efficiency;  $R^2$ , coefficient of determination]

Water year and monthly statistics													
Statistic	WY	October	November	December	January	February	March	April	May	June	July	August	September
06342500 Missouri River at Bismarck, North Dakota													
<i>PBIAS</i>	1.20	3.80	2.40	2.40	6.30	6.60	-2.30	-8.60	5.20	2.40	0.500	-1.80	-1.10
<i>RSR</i>	0.0653	0.949	0.218	0.456	0.774	6.77	0.820	0.654	0.178	0.316	0.257	0.208	0.114
<i>NSE</i>	0.996	0.0691	0.951	0.785	0.382	-46.5	0.305	0.558	0.967	0.896	0.932	0.956	0.987
$R^2$	0.996	0.824	0.991	0.868	0.999	0.728	0.327	0.881	0.986	0.965	0.939	0.980	0.992
06486000 Missouri River at Sioux City, Iowa													
<i>PBIAS</i>	0.100	0.500	-0.400	2.80	6.10	9.00	1.90	-0.400	1.10	-3.00	1.00	-1.80	-0.100
<i>RSR</i>	0.0522	0.221	0.205	0.190	1.40	0.668	0.142	0.153	0.218	0.227	0.730	0.184	0.0996
<i>NSE</i>	0.997	0.949	0.957	0.963	-1.02	0.538	0.979	0.976	0.951	0.947	0.450	0.965	0.990
$R^2$	0.998	0.981	0.960	0.973	0.457	0.791	0.992	0.981	0.974	0.985	0.687	0.988	0.991
06610000 Missouri River at Omaha, Nebraska													
<i>PBIAS</i>	-0.100	-3.10	-2.60	-2.40	4.60	-1.30	4.90	-3.30	-3.60	-0.400	0.300	2.80	1.30
<i>RSR</i>	0.0753	0.498	0.666	0.251	1.94	0.544	0.284	0.508	0.526	0.129	0.715	0.344	0.235
<i>NSE</i>	0.994	0.744	0.541	0.935	-2.91	0.693	0.917	0.733	0.714	0.983	0.471	0.877	0.943
$R^2$	0.994	0.937	0.848	0.952	0.115	0.745	0.958	0.791	0.887	0.984	0.490	0.957	0.965
06807000 Missouri River at Nebraska City, Nebraska													
<i>PBIAS</i>	-1.90	-1.70	-0.800	-2.70	-8.40	-0.100	-2.30	-0.900	-1.50	-3.80	-1.60	-1.00	-1.60
<i>RSR</i>	0.0892	0.168	0.267	0.142	3.37	0.129	0.114	0.111	0.323	0.285	1.68	0.246	0.185
<i>NSE</i>	0.992	0.971	0.927	0.979	-10.7	0.983	0.987	0.987	0.892	0.916	-1.93	0.938	0.965
$R^2$	0.994	0.992	0.956	0.993	0.142	0.985	0.995	0.992	0.956	0.971	0.00	0.948	0.989
06818000 Missouri River at Saint Joseph, Missouri													
<i>PBIAS</i>	2.20	0.700	2.30	1.60	9.70	6.20	3.80	1.40	2.00	-4.90	6.50	0.400	3.20
<i>RSR</i>	0.151	0.284	0.604	0.352	3.78	0.519	0.367	0.464	0.486	0.445	1.15	0.401	0.306
<i>NSE</i>	0.977	0.917	0.623	0.872	-13.7	0.721	0.861	0.778	0.756	0.796	-0.366	0.834	0.903
$R^2$	0.979	0.964	0.794	0.905	0.502	0.765	0.910	0.790	0.792	0.837	0.382	0.865	0.972
06893000 Missouri River at Kansas City, Missouri													
<i>PBIAS</i>	-2.20	-1.80	-0.600	-2.60	-4.50	-1.70	2.30	-2.20	-0.500	-3.90	-6.00	-1.60	1.30
<i>RSR</i>	0.120	0.185	0.235	0.188	1.48	0.190	0.195	0.233	0.282	0.893	1.50	0.359	0.164
<i>NSE</i>	0.986	0.965	0.943	0.964	-1.26	0.963	0.961	0.944	0.918	0.175	-1.34	0.867	0.972
$R^2$	0.991	0.997	0.953	0.986	0.633	0.964	0.992	0.978	0.920	0.907	0.944	0.982	0.988

**Table 3.** Statistical test results for model performance at selected U.S. Geological Survey (USGS) streamgages used in the Missouri River Precipitation-Runoff Modeling System (PRMS) model.—Continued


[Water year (October 1, 2010 through September 31, 2011); *PBIAS*, percent bias; *RSR*, root mean square error-observation standard deviation ratio; *NSE*, Nash and Sutcliffe coefficient of efficiency; *R*<sup>2</sup>, coefficient of determination]

Water year and monthly statistics													
06906500 Missouri River at Glasgow, Missouri													
<i>PBIAS</i>	0.00	2.20	-2.60	-1.50	-1.70	2.80	3.50	2.20	1.70	-0.800	-3.00	0.500	-0.400
<i>RSR</i>	0.0895	0.203	0.446	0.127	0.571	0.250	0.413	0.278	0.256	0.249	0.675	0.303	0.101
<i>NSE</i>	0.992	0.958	0.794	0.983	0.663	0.935	0.823	0.920	0.933	0.936	0.529	0.905	0.990
<i>R</i> <sup>2</sup>	0.992	0.992	0.911	0.991	0.948	0.940	0.883	0.933	0.940	0.942	0.972	0.959	0.991
06909000 Missouri River at Boonville, Missouri													
<i>PBIAS</i>	0.800	1.60	1.40	1.20	0.900	-0.100	-1.20	1.90	0.200	1.40	1.00	-0.200	1.90
<i>RSR</i>	0.0487	0.145	0.208	0.0906	0.309	0.0759	0.234	0.185	0.110	0.177	0.221	0.130	0.172
<i>NSE</i>	0.998	0.978	0.955	0.992	0.901	0.994	0.943	0.965	0.987	0.968	0.950	0.983	0.969
<i>R</i> <sup>2</sup>	0.998	0.992	0.988	0.996	0.959	0.994	0.972	0.975	0.988	0.982	0.989	0.986	0.999
06935965 Missouri River at Saint Charles, Missouri													
<i>PBIAS</i>	0.300	0.900	-2.00	-0.600	-0.400	4.90	1.50	-0.600	-0.900	-0.200	1.00	0.600	-0.500
<i>RSR</i>	0.0697	0.119	0.801	0.108	0.549	0.146	0.244	0.0758	0.151	0.297	0.221	0.448	0.174
<i>NSE</i>	0.995	0.985	0.336	0.988	0.688	0.978	0.939	0.994	0.976	0.909	0.950	0.792	0.969
<i>R</i> <sup>2</sup>	0.995	0.988	0.741	0.989	0.892	0.988	0.949	0.995	0.982	0.912	0.972	0.823	0.977

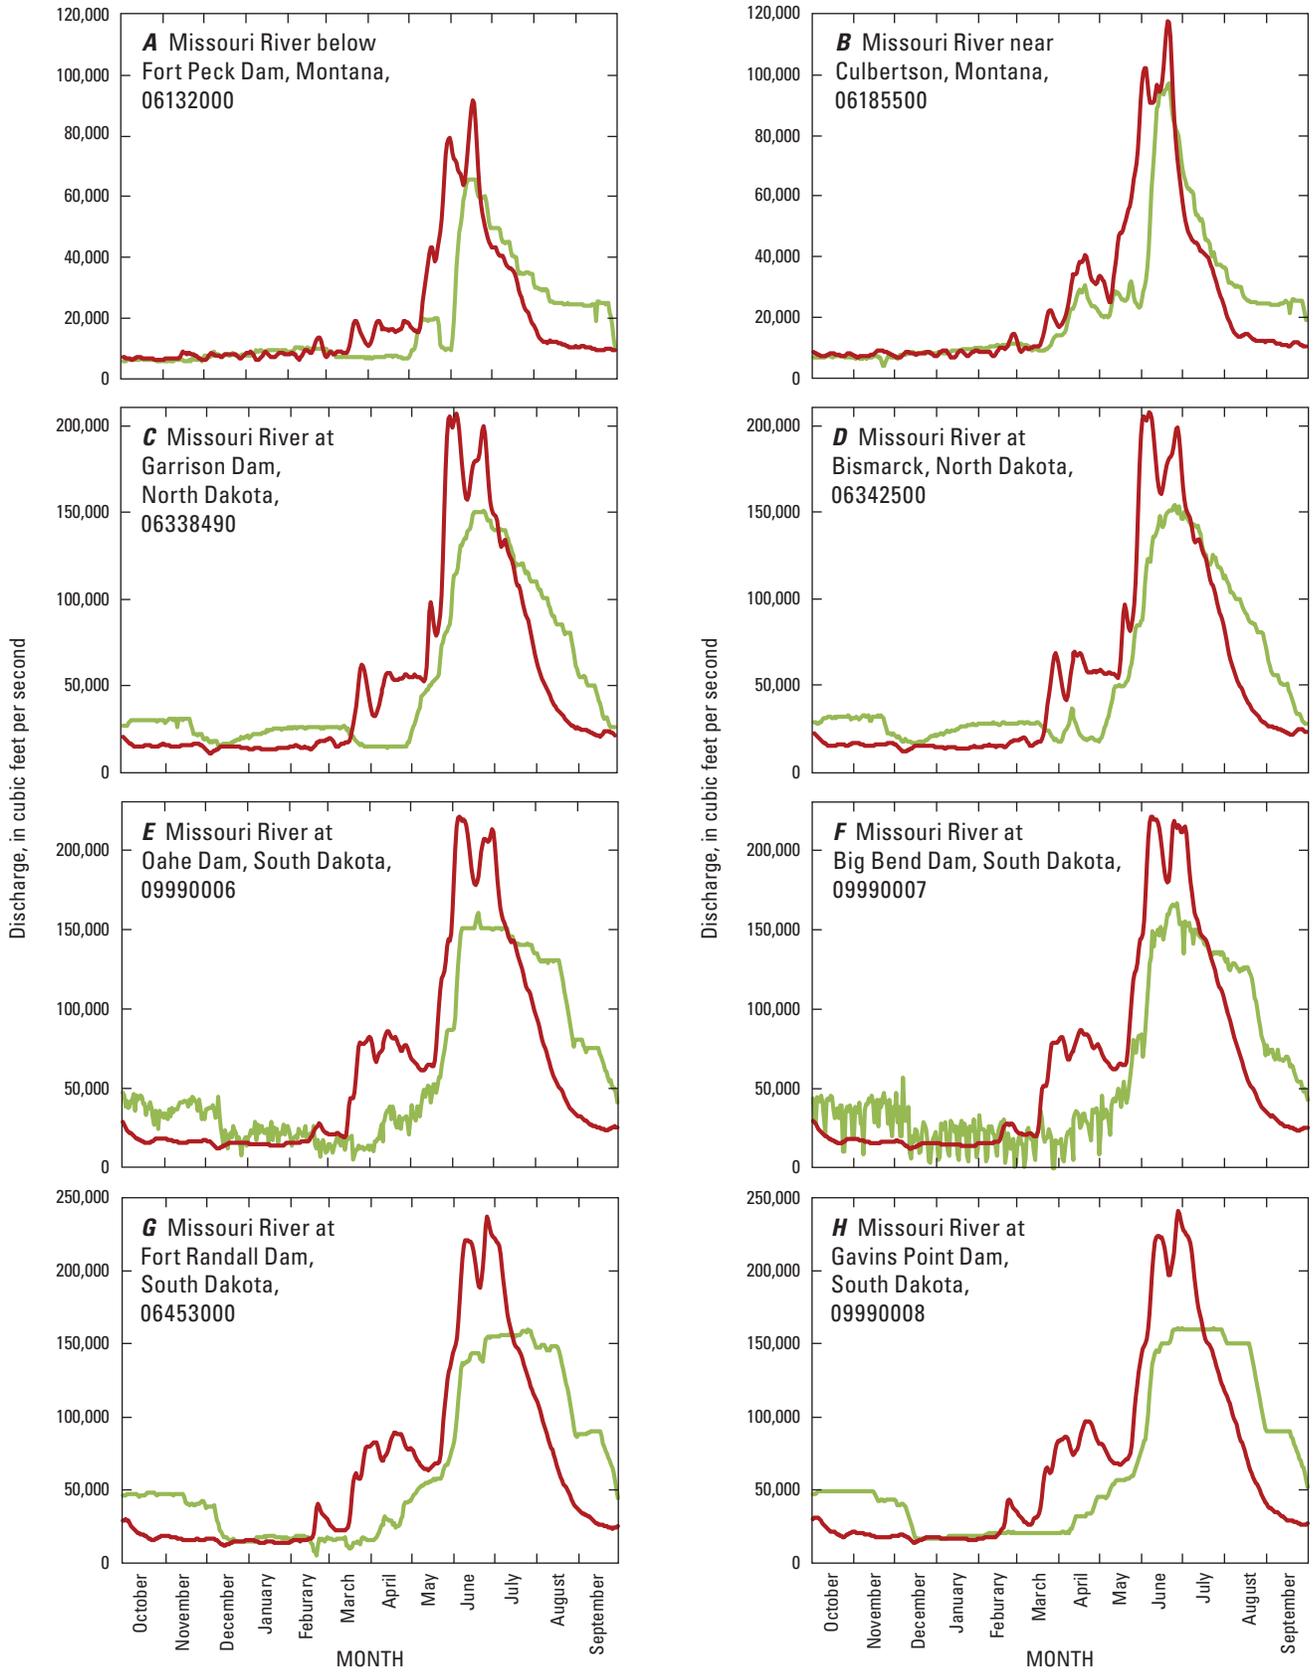


**Figure 9.** Unregulated daily mean streamflow simulated using the Missouri River Precipitation-Runoff Modeling System model as compared to measured regulated streamflows for selected locations on the Missouri River during 2011 water year.

**EXPLANATION**  
 — Simulated unregulated streamflow  
 — Observed regulated streamflow

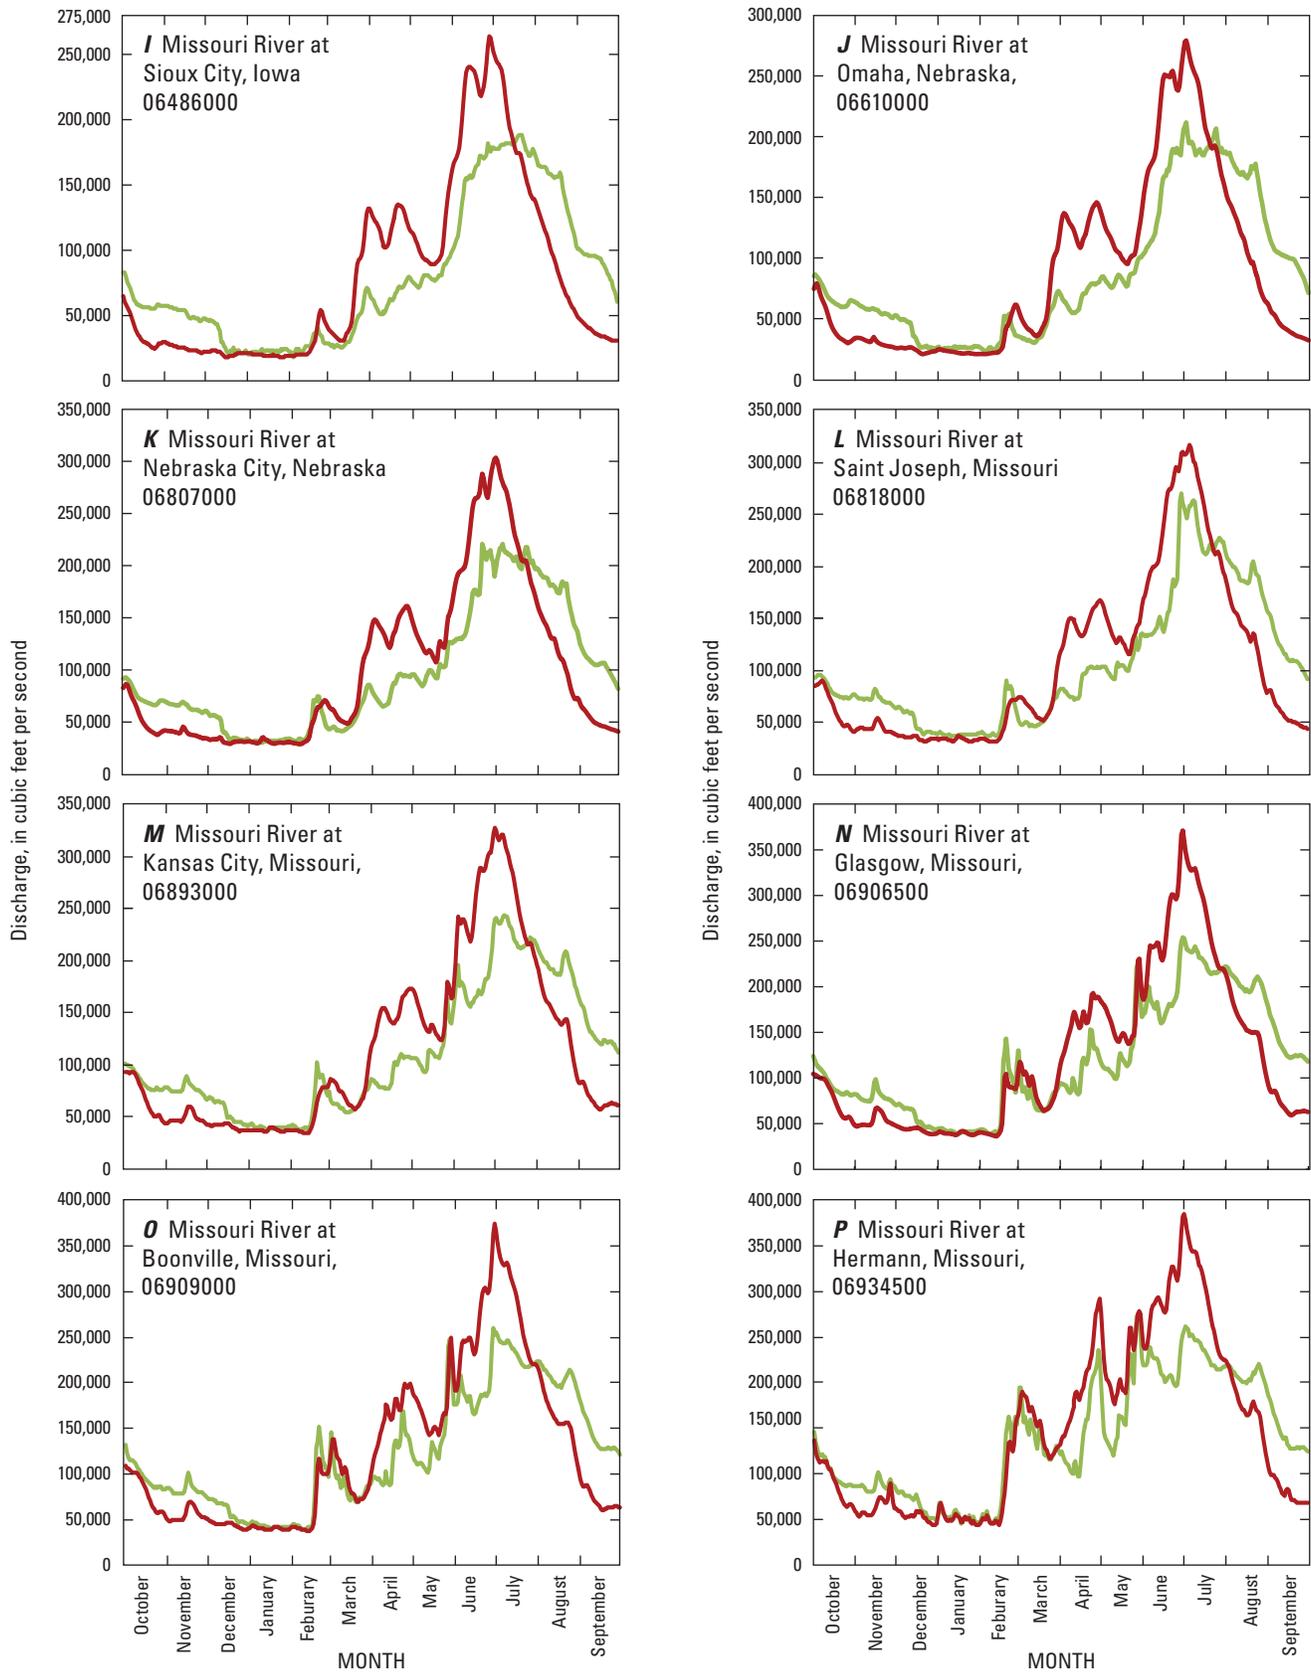

**Figure 9.** Unregulated daily mean streamflow simulated using the Missouri River Precipitation-Runoff Modeling System model as compared to measured regulated streamflows for selected locations on the Missouri River during 2011 water year.—  
Continued

**EXPLANATION**  
— Simulated unregulated streamflow  
— Observed regulated streamflow

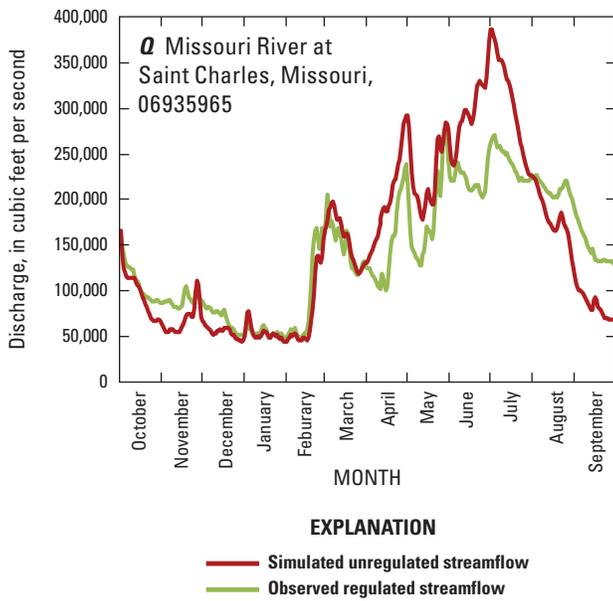

**Figure 9.** Unregulated daily mean streamflow simulated using the Precipitation-Runoff Modeling System (PRMS) model as compared to measured regulated streamflows for selected locations on the Missouri River during 2011 water year.—Continued

To further compare the effects of regulation on flood duration and severity, two additional methods of comparison are presented. The first method compares the number of days in which SDAD values were greater than or equal to the maximum MDAD value (table 4). This difference is the number of days streamflow would have exceeded the measured peak daily flow had no regulation been in place. The second method of comparison uses simulated flow, measured flow, measured stream stage record (elevation of the surface of the stream above NAVD 29 datum), and National Weather Service (NWS) 2011 flood category stage thresholds for Minor, Moderate, and Major Flood events (W. Ross, National Oceanic and Atmospheric Administration, written commun., 2013). This method establishes a metric, the unregulated difference in stage (UDS), which is calculated for each NWS flood category stage threshold (Minor, Moderate, and Major), and represents the number of additional days a stage threshold would have been exceeded if no regulation was in place. UDS is calculated:

$$UDS_{stage} = (\text{no. of days } Q_{SIM} > Q_{stage}) - (\text{no. of days } Q_M > Q_{stage}) \quad (5)$$

where

- $Q_{SIM}$  is simulated flow
- $Q_M$  is measured flow
- $Q_{stage}$  is the minimum stream flow associated with NWS flood stage threshold, and
- no. is number.

Available USGS NWIS measured stage records at each streamgage were collected from USGS Water Science Centers for WY 2011 and used in the UDS calculation (U.S. Geological Survey, 2013). Simulated stage values were determined from simulated discharge values using 2011 stage-discharge ratings that were developed at each USGS streamgaging station (U.S. Geological Survey, 2013). For this, MDAD values associated with each NWS flood stage exceedance on both rising and falling limbs were established. When SDAD exceeded the MDAD associated with a NWS flood stage threshold, the Missouri River (simulation) was inferred to have exceeded the flood stage. The number of days each NWS flood stage would have been met or exceeded were counted in both the measured and simulated data, and compared using the UDS metric (table 4). If a particular NWS flood stage category threshold was not reached at a specific streamgage in the measured record, but was met or exceeded in the simulation, the USGS NWIS stage-discharge rating curve in effect for 2011 was used to estimate flow for stage exceedance.

### Fort Peck Dam and Culbertson, Montana

The Missouri River model simulated flows for the streamgage location below Fort Peck Dam show that the dam eliminated an early summer peak flow with a SDAD value of 79,300 ft<sup>3</sup>/s (fig. 9A). The dam also lowered a second summer peak flow with the maximum SDAD value of 92,000 ft<sup>3</sup>/s to 65,900 ft<sup>3</sup>/s (MDAD). Both maximum SDAD and MDAD values for 2011 are greater than the measured peak discharge values from 1952 (table 4). Simulated flows during August and September show the river receding to approximately 10,000 ft<sup>3</sup>/s, whereas, because of regulated releases from Fort Peck Dam, actual, measured flows remained at approximately 25,000 ft<sup>3</sup>/s during those months. Model results show that without upstream regulation, SDAD values would have equaled or exceeded the maximum MDAD value for 23 days (table 4). NWS flood category stage thresholds are not established at this location; therefore UDS metrics were not calculated.

For the streamgage location near Culbertson, Montana, the downstream effects of regulation are similar to those at Fort Peck Dam. Here an early summer peak with a SDAD value of 102,400 ft<sup>3</sup>/s was eliminated by upstream regulation, and a second summer peak with the maximum SDAD value of 117,900 ft<sup>3</sup>/s was reduced to 97,200 ft<sup>3</sup>/s (fig. 9B). Both maximum SDAD and MDAD values for 2011 are greater than the measured peak discharge values from 1952 (table 4). The model results show that during August and September, SDAD values would have been approximately 11,000 ft<sup>3</sup>/s. Instead, controlled releases from Fort Peck Dam maintained a base flow of approximately 25,000 ft<sup>3</sup>/s during these months. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 13 days (table 4). During 2011, MDAD and SDAD values did

not exceed the NWS Minor Flood stage threshold, therefore UDS metrics were not calculated at this gage.

### **Garrison Dam and Bismarck, North Dakota**

The Missouri River model simulated flows for the streamgage location at Garrison Dam show that upstream regulation eliminated an early summer peak flow, with the maximum SDAD value of 206,800 ft<sup>3</sup>/s (fig. 9C). Upstream regulation also lowered a second summer peak flow, with an SDAD value of 200,100 ft<sup>3</sup>/s to 150,600 ft<sup>3</sup>/s (MDAD). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which converge with MDAD values of approximately 25,000 ft<sup>3</sup>/s by the end of the water year (September 30, 2011). Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 35 days (table 4). No NWS flood stage information was available at this location; therefore no UDS metrics could be calculated.

For the streamgage location at Bismarck, North Dakota, which is downstream of Garrison Dam, upstream regulation eliminated an early summer peak flow with the maximum SDAD value of 207,700 ft<sup>3</sup>/s (table 4 and fig. 9D). Upstream regulation also lowered a second summer peak flow with an SDAD value of 199,300 ft<sup>3</sup>/s to 154,000 ft<sup>3</sup>/s (the maximum MDAD value). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). As at Garrison Dam, the model shows decreased SDAD values during August and September relative to MDAD values, which converge with MDAD values of approximately 25,000 ft<sup>3</sup>/s by the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 35 days (table 4).

During 2011, the NWS Major Flood stage was reached at Bismarck, North Dakota. The UDS for Major Flood stage is 4 days, however the UDS for Moderate Flood stage is -9 days and Minor Flood stage is -10 days. These results indicate that upstream regulation decreased the number of days at Major Flood stage and increased the number of days at Minor and Moderate Flood stages.

### **Oahe Dam, South Dakota**

The Missouri River model simulated flows for the streamgage location at Oahe Dam show that upstream regulation eliminated an early summer peak flow with the maximum SDAD value of 220,900 ft<sup>3</sup>/s (fig. 9E). Upstream regulation also lowered a second summer peak flow with an SDAD value of 212,800 ft<sup>3</sup>/s to 160,300 ft<sup>3</sup>/s (the maximum MDAD value). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4).

The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 36 days (table 4). No NWS flood stage information was available at this location; therefore no UDS metrics could be calculated.

### **Big Bend Dam, South Dakota**

The Missouri River model simulated flows for the streamgage location at Big Bend Dam show that regulation eliminated an early summer peak flow with the maximum SDAD value of 220,400 ft<sup>3</sup>/s (fig. 9F). Upstream regulation also lowered a second summer peak flow, with a SDAD value of 217,600 ft<sup>3</sup>/s to 166,300 ft<sup>3</sup>/s (the maximum MDAD value). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 35 days (table 4). No NWS flood stage information was available at this location; therefore no UDS metrics could be calculated.

### **Fort Randall Dam, South Dakota**

The Missouri River model simulated flows for the streamgage location at Fort Randall Dam show that regulation eliminated an early summer peak flow with an SDAD value of 221,000 ft<sup>3</sup>/s (fig. 9G). Upstream regulation also lowered a second summer peak flow with the maximum SDAD value of 236,700 ft<sup>3</sup>/s to 160,000 ft<sup>3</sup>/s (the maximum MDAD value). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 39 days (table 4). No NWS flood stage information was available at this location; therefore no UDS metrics could be calculated.

### **Gavins Point Dam, South Dakota**

The Missouri River model simulated flows for the streamgage location at Gavins Point Dam show that regulation eliminated an early summer peak flow with an SDAD value of 223,300 ft<sup>3</sup>/s (fig. 9H). Upstream regulation also lowered a second summer peak flow with the maximum SDAD value of 241,100 ft<sup>3</sup>/s to 160,700 ft<sup>3</sup>/s (the maximum MDAD value).

**Table 4.** Maximum measured and maximum simulated daily average discharge and number of days that the National Weather Service (NWS) flood category stage threshold was exceeded for selected U.S. Geological Survey (USGS) streamgages and United States Army Corps of Engineers (USACE) dam outflow sites.

[USGS, U.S. Geological Survey; MDAD, Measured Daily Average Discharge; SDAD, Simulated Daily Average Discharge; ft<sup>3</sup>/s, cubic feet per second; NWS, National Weather Service; Stage, height of water surface above datum at which minor, moderate, or major flooding occurs; Meas, Measured data; Sim, Simulation data; UDS, Uregulated Difference in Stage (this number represents the increase or decrease in the number of days at or above NWS Flood Stage during the 2011 Flood if no regulation was present on the Missouri main stem); –, No floods stages determined at these sites; \*, measured or simulated flows did not meet or exceed stage; na, not available]

USGS streamgage number	USGS station name	2011 Maximum MDAD (ft <sup>3</sup> /s)	2011 Maximum SDAD (ft <sup>3</sup> /s)	Number of days stage was at or above NWS flood stage threshold									Number of days maximum SDAD exceeded maximum MDAD	1952 Measured peak discharge, (ft <sup>3</sup> /s), (wells, 1955)	
				Minor flood			Moderate flood			Major flood					
				Meas	Sim	UDS	Meas	Sim	UDS	Meas	Sim	UDS			
06132000	Missouri River below Fort Peck Dam, Montana	65,900	92,000	–	–	–	–	–	–	–	–	–	–	23	27,400
06185500	Missouri River near Culbertson, Montana	97,200	117,900	*	*	*	*	*	*	*	*	*	*	13	46,800
06338490	Missouri River at Garrison Dam, North Dakota	<sup>1</sup> 150,600	206,800	–	–	–	–	–	–	–	–	–	–	35	<sup>7</sup> 348,000
06342500	Missouri River at Bismarck, North Dakota	154,000	207,700	99	89	-10	77	68	-9	49	53	4	35	500,000	
509990006	Missouri River at Oahe Dam, South Dakota	<sup>2</sup> 160,300	220,900	–	–	–	–	–	–	–	–	–	–	36	<sup>8</sup> 440,000
509990007	Missouri River at Big Bend Dam, South Dakota	<sup>3</sup> 166,300	220,400	–	–	–	–	–	–	–	–	–	–	35	<sup>9</sup> 440,000
06453000	Missouri River at Fort Randall Dam, South Dakota	160,000	236,700	–	–	–	–	–	–	–	–	–	–	39	447,000
509990008	Missouri River at Gavins Point Dam, South Dakota	<sup>4</sup> 160,700	241,100	–	–	–	–	–	–	–	–	–	–	40	<sup>10</sup> 480,000
06486000	Missouri River at Sioux City, Iowa	189,000	264,500	81	84	3	66	56	-10	*	635	35	37	441,000	
06610000	Missouri River at Omaha, Nebraska	212,000	279,500	101	131	30	75	66	-9	*	*	*	34	396,000	

**Table 4.** Maximum measured and maximum simulated daily average discharge and number of days that the National Weather Service (NWS) flood category stage threshold was exceeded for selected U.S. Geological Survey (USGS) streamgages and United States Army Corps of Engineers (USACE) dam outflow sites.—Continued

[USGS, U.S. Geological Survey; MDAD, Measured Daily Average Discharge; SDAD, Simulated Daily Average Discharge; ft<sup>3</sup>/s, cubic feet per second; NWS, National Weather Service; Stage, height of water surface above datum at which minor, moderate, or major flooding occurs; Meas, Measured data; Sim, Simulation data; UDS, Uregulated Difference in Stage (this number represents the increase or decrease in the number of days at or above NWS Flood Stage during the 2011 Flood if no regulation was present on the Missouri main stem); –, No floods stages determined at these sites; \*, measured or simulated flows did not meet or exceed stage; na, not available]

USGS streamgage number	USGS station name	2011 Maximum MDAD (ft <sup>3</sup> /s)	2011 Maximum SDAD (ft <sup>3</sup> /s)	Number of days stage was at or above NWS flood stage threshold									Number of days maximum SDAD exceeded maximum MDAD	1952 Measured peak discharge, (ft <sup>3</sup> /s), (wells, 1955)
				Minor flood			Moderate flood			Major flood				
				Meas	Sim	UDS	Meas	Sim	UDS	Meas	Sim	UDS		
06807000	Missouri River at Nebraska City, Nebraska	221,000	303,800	169	154	-15	65	93	28	10	53	43	45	414,000
06818000	Missouri River at Saint Joseph, Missouri	270,000	317,000	160	152	-8	104	91	-13	46	51	5	26	397,000
06893000	Missouri River at Kansas City	243,000	327,700	8	41	33	*	626	26	*	*	*	34	400,000
06906500	Missouri River at Glasgow, Missouri	254,000	374,200	95	92	-3	70	67	-3	*	628	28	33	na
06909000	Missouri River at Boonville, Missouri	260,000	374,200	102	103	1	*	*	*	*	*	*	32	360,000
06934500	Missouri River at Hermann, Missouri	274,000	385,200	107	100	-7	3	53	50	*	*	*	52	368,000
06935965	Missouri River at Saint Charles, Missouri	277,000	387,100	71	90	19	*	628	28	*	*	*	51	na

<sup>1</sup>Peak reservoir outflow same as USGS streamgage 06339000, Missouri River below Garrison Dam, North Dakota.

<sup>2</sup>Peak reservoir outflow same as USGS streamgage 06440000, Missouri River at Pierre, South Dakota.

<sup>3</sup>Peak reservoir outflow same as USGS streamgage 06443000, Missouri River at Chamberlain, South Dakota.

<sup>4</sup>Peak reservoir outflow same as USGS streamgage 06467500, Missouri River at Yankton, South Dakota.

<sup>5</sup>U.S. Army Corps of Engineers reservoir outflow sites.

<sup>6</sup>Stage not met in 2011 water year: stage-discharge relation inferred from 2011 rating curve (U.S. Geological Survey, 2013).

<sup>7</sup>Discharge values from 06339000 Missouri River below Garrison Dam, North Dakota.

<sup>8</sup>Discharge values from 06440000 Missouri River at Pierre, South Dakota.

<sup>9</sup>Discharge values from 06443000 Missouri River at Chamberlain, South Dakota.

<sup>10</sup>Discharge values from 0647500 Missouri River at Yankton, South Dakota.

Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 40 days (table 4). No NWS flood stage information was available at this location; therefore no UDS metrics could be calculated.

## Sioux City, Iowa

At the Sioux City, Iowa streamgage location, the model simulated two spring peak flows with SDAD values of 132,300 and 134,800 ft<sup>3</sup>/s, and two summer peak flows with SDAD values of 240,500 and 264,500 ft<sup>3</sup>/s (fig. 9I). Upstream regulation eliminated the spring peak flows and consolidated the summer peak flows into one long, high-flow event with a maximum MDAD value of 189,000 ft<sup>3</sup>/s. Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 37 days (table 4).

During 2011, the NWS Moderate and Minor Flood stages were reached at this streamgage. Model results show that, without upstream regulation, Major Flood stage also would have been reached. The UDS for Major Flood Stage is 35 days; the UDS for Moderate Flood stage is -10 days; the UDS for Minor Flood stage is 3 days. These metrics indicate that upstream regulation decreased the number of days at Major and Moderate Flood stages and increased the number of days at Minor Flood stage.

## Omaha, Nebraska

At the Omaha, Nebraska streamgage location, the model simulated two spring peak flows with SDAD values of 137,300 and 145,200 ft<sup>3</sup>/s, and two summer peak flows with SDAD values of 254,500 and 279,500 ft<sup>3</sup>/s (fig. 9J). Upstream regulation eliminated the spring peak flows and lowered the summer peak flows to 190,000 and 212,000 ft<sup>3</sup>/s (MDAD values), respectively. Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 34 days (table 4).

During 2011, the NWS Moderate and Minor Flood stages were exceeded at this streamgage in both the measured and

simulated flow records. The UDS for Moderate Flood stage is -9 days and the UDS for Minor Flood stage is 30 days. These metrics indicate that upstream regulation increased the number of days at Moderate Flood stage and largely decreased the number of days at Minor Flood stage, but do not indicate that regulation increased the severity of the flooding. Although Major Flood stage was not met at Omaha, Nebraska, simulated flows did exceed the maximum measured flow for 34 days. The decrease in the maximum peak flow by regulation is the cause for the increase in the number of days at or above Moderate Flood stage.

## Nebraska City, Nebraska

At Nebraska City, Nebraska, the model simulated two spring peak flows with SDAD values of 148,500 and 161,500 ft<sup>3</sup>/s, and two summer peak flows with SDAD values of 288,300 and 303,800 ft<sup>3</sup>/s (fig. 9K). Upstream regulation eliminated the spring peak flows and lowered the summer peak flows to 221,000 ft<sup>3</sup>/s (maximum MDAD value). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 45 days (table 4).

During 2011, the NWS Major Flood stage was exceeded at this streamgage in both the measured and simulated flow records. The UDS for Major Flood stage is 43 days and the UDS for Moderate and Minor Flood stages are 28 and -15 days. These metrics indicate that upstream regulation decreased the number of days at Major Flood and Moderate Flood stages and increased the number of days at Minor Flood stage (table 4).

## Saint Joseph, Missouri

At the Saint Joseph, Missouri streamgage location, the model simulated two spring peak flows with SDAD values of 150,100 and 167,200 ft<sup>3</sup>/s, and one summer peak flow with the maximum SDAD value of 317,000 ft<sup>3</sup>/s (fig. 9L). Upstream regulation reduced the spring peak flows in number and magnitude to a single spring flood peak with a maximum MDAD value of 104,000 ft<sup>3</sup>/s, and reduced the summer peak flow to a maximum MDAD value of 270,000 ft<sup>3</sup>/s. Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 26 days (table 4).

During 2011, the NWS Major Flood stage was exceeded at this streamgage in both the measured and simulated flow records. The UDS for Major Flood stage is 5 days and the UDS for Moderate and Minor Flood stages are -13 and -8 days. These metrics indicate that upstream regulation decreased the number of days at Major Flood stage and increased the number of days at Moderate Flood and Minor Flood stages (table 4).

### Kansas City, Missouri

The Missouri River model simulated flows at the Kansas City, Missouri streamgage location show that upstream regulation lowered a spring peak flow with an SDAD value of 173,000 ft<sup>3</sup>/s to 117,000 ft<sup>3</sup>/s (MDAD value), and lowered a summer peak flow with the maximum SDAD value of 327,700 ft<sup>3</sup>/s to 243,000 ft<sup>3</sup>/s (maximum MDAD value) (fig. 9M). Both maximum SDAD and MDAD values for 2011 are less than the measured peak discharge values from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 34 days (table 4).

During 2011, the NWS Minor Flood stage was exceeded at this streamgage in the measured and simulated flow records and Moderate Flood stage was exceeded in the simulated flow records. The UDS for Moderate Flood stage is 26 days, and the UDS for Minor Flood stage is 33 days. These metrics indicate that upstream regulation decreased the number of days at Moderate Flood and Minor flood stages (table 4). The simulation indicates that Major Flood stage would have not been reached.

### Glasgow, Missouri

The Missouri River model simulated flows at the Glasgow, Missouri streamgage show that upstream regulation lowered a spring peak flow with an SDAD value of 199,200 ft<sup>3</sup>/s to 153,000 ft<sup>3</sup>/s (MDAD value), and lowered a summer peak flow with the maximum SDAD value of 374,200 ft<sup>3</sup>/s to 254,000 ft<sup>3</sup>/s (maximum MDAD value) (fig. 9N). No measured peak discharge value was available for 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 33 days (table 4).

During 2011, the NWS Moderate Flood stage was exceeded at this streamgage in the measured and simulated records and NWS Major Flood stage was exceeded in the simulated flow records. The UDS for Major Flood stage is

28 days and the UDS for Moderate and Minor Flood stages are both -3 days. These metrics indicate that upstream regulation decreased the number of days at Major Flood stage and increased the number of days at Moderate Flood and Minor Flood stages (table 4).

### Boonville, Missouri

The Missouri River model simulated flows at the Boonville, Missouri streamgage location show that upstream regulation lowered a spring peak flow with an SDAD value of 199,300 ft<sup>3</sup>/s to 168,000 ft<sup>3</sup>/s (MDAD value), and lowered a summer peak flow with the maximum SDAD value of 374,200 ft<sup>3</sup>/s to 260,000 ft<sup>3</sup>/s (maximum MDAD value) (fig. 9M). The maximum MDAD value for 2011 is less than the measured peak discharge values from 1952, however the maximum SDAD value for 2011 is greater than the measured peak discharge value from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 32 days (table 4).

During 2011, the NWS Minor Flood stage was exceeded at this streamgage in the measured and simulated flow records. The UDS for Minor Flood stage is 1 day. The simulation indicates that Major and Moderate Flood stage would have not been reached in the absence of regulation. Note the small UDS value is due to the elimination of spring flood period at this streamgage because of regulation. Although the summer flood period was extended because of regulation, the total measured number of days in flood is roughly equal to the sum of the simulated spring flood and summer flood periods (fig. 9O).

### Hermann, Missouri

The Missouri River model simulated flows at the Hermann, Missouri streamgage location show that upstream regulation lowered a spring peak flow with an SDAD value of 292,700 ft<sup>3</sup>/s to 235,000 ft<sup>3</sup>/s (MDAD value), and lowered a summer peak flow with the maximum SDAD value of 385,200 ft<sup>3</sup>/s to 261,000 ft<sup>3</sup>/s (MDAD value) (fig. 9P). Note this summer MDAD peak flow is not the maximum MDAD value of 274,000 ft<sup>3</sup>/s, which occurred in May. The maximum MDAD value for 2011 is less than the measured peak discharge value from 1952, however the maximum SDAD value for 2011 is greater than the measured peak discharge value from 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 52 days (table 4).

During 2011, the NWS Moderate Flood stage was exceeded at this streamgage in the measured and simulated flow records. The UDS for Moderate Flood stage is 50 days, and the UDS for Minor Flood stages is -7 days. These metrics indicate that upstream regulation decreased the number of days at Moderate Flood stage and increased the number of days at Minor Flood stage (table 4).

## Saint Charles, Missouri

The Missouri River model simulated flows at the Saint Charles, Missouri streamgage location show that upstream regulation lowered a spring peak flow with an SDAD value of 292,400 ft<sup>3</sup>/s to 239,000 ft<sup>3</sup>/s (MDAD), and lowered a summer peak flow with the maximum SDAD value of 387,100 ft<sup>3</sup>/s to 271,000 ft<sup>3</sup>/s (MDAD value) (fig. 9Q). Note this summer peak flow is not the maximum MDAD value of 277,000 ft<sup>3</sup>/s, which occurred earlier in May. Measured peak discharge was not available for 1952 (table 4). The model shows decreased SDAD values during August and September relative to MDAD values, which begin to converge with MDAD values at the end of the water year. Model results show that without upstream regulation, SDAD values would have met or exceeded the maximum MDAD value for 51 days (table 4).

During 2011, the NWS Minor Flood stage was exceeded at this streamgage in the measured and simulated records and Moderate Flood stage was exceeded in the simulated flow records. The UDS for Minor Flood stage is 19 days and the UDS for Moderate Flood stage is 28 days. At Saint Charles, Missouri, regulation reduced number of days at or exceeding Minor Flood stage and eliminated all days when the river would have met or exceeded Moderate Flood stage.

## Model Limitations

There are several notable limitations in the Missouri River model. First, the model simulates a daily time step, with all flows and storages expressed as daily mean values. Because of this, error may result because of the daily averaging of flows, or when streamflow changes at subdaily time increments (Markstrom and others, 2012). Second, the HRU sizes are large, and parameter values, flows, and storages are assumed to be homogeneous within each HRU. Because of the coarse spatial resolution of the model, some hydrologic complexity and parameter variability within an HRU are lost. Third, the method of simulating solar radiation values for each HRU does not account for variations in solar activity or changes in weather events. This limitation, however, typically results in only small changes in solar radiation, which have a minimal effect on hydrologic variables and projected basin runoff (Markstrom and others, 2012). Fourth, complications occur in simulations when rain falls on the snowpack in excess of its available pore space; either the water will runoff

the snowpack, in which case it is erroneously simulated as snowmelt, or the water will freeze to the snowpack, causing the model to later report more snowmelt than snowfall (Markstrom and others, 2012). Both of these cases may complicate interpretation of the model results with regard to rain on snowpack events. Fifth, this study used the Jensen-Haise method (Jensen and others 1970; and Markstrom and others, 2008) to estimate stationary monthly mean values for potential evapotranspiration (PET) at each calibration point for subbasin model calibration, which may be a source of uncertainty in the model. Studies (Kingston and others, 2009; Donohue and others, 2010) report that this uncertainty is reduced because PRMS uses simulated PET, vegetation type, land-use characteristics, soil type, simulated atmospheric conditions, and soil moisture availability to compute actual evapotranspiration (AET), and it is AET that PRMS used in the water balance simulation (Markstrom and others, 2008; and Markstrom and others, 2012). A more detailed discussion of PET uncertainty in the PRMS model is presented in Markstrom and others (2012).

The Missouri River model was designed and calibrated to simulate the peak flows in the Missouri River for the 2011 water year. Because of this, the model has further assumptions and limitations that bear mentioning. First, the model was built using streamgage data from tributary streams as inflows to better simulate the effects of Missouri River regulation on flows. Because of this, the model does not simulate tributary stream flows. Second, several tributary inflow and calibration streamgages on the Missouri River have limited measurement records, which reduced the model calibration and simulation periods in certain reaches, making it impossible in the current model configuration to simulate flows for all years. Third, precise calibration of the Missouri River subbasin models upstream from Gavins Point Dam was problematic because available streamgage data on the reaches affected by storage and controlled releases represent regulated flow conditions, and are therefore not appropriate for model calibration. In these cases, USACE naturalized flows were used for model calibration at subbasin outlets, which may create more uncertainty in simulated flows upstream of Gavins Point Dam. This is evident in the statistical test results (*PBIAS*, *PSP*, *NSE*, and *R*<sup>2</sup>) for the Missouri River at Bismarck, North Dakota (table 3). Fourth, the PRMS model assumes that all runoff flows to the channel and is routed to downstream segments. The model cannot simulate the effects of overbank storage from events such as natural flooding and levee failures. This may result in over-simulation of flood peaks during extreme flood events. Fifth, the model was calibrated with emphasis placed on the peak flow timing during high-flow months (April-August). As part of this approach and use of the Muskingum routing method, routing segment travel times, *k*, were decreased to improve peak timing. As a result, simulated flow peak timing during low-flow months may be less accurate. Sixth, water withdrawals or wastewater discharges were not

addressed in the model. The effects were assumed to not be significant compared to runoff volumes of WY 2011.

The comparison of simulation results and measured flows at streamgages indicate that U.S. Army Corps of Engineers operation of the Reservoir System eliminated or greatly reduced spring peak flow events, consolidated two summer peak flow events to one with a markedly decreased magnitude, and maintained higher than normal base flow beyond the end of the water year. Additional comparative metrics using National Weather Service flood stages show that without the Reservoir System, flows greater than those measured would have been sustained for much longer, commonly in excess of 30 days, and overall the flooding associated with high-flow events would have been more severe, often progressing to a higher NWS flood stage threshold.

## Summary

The Missouri River flows through the largest reservoir system in North America. The Missouri River Mainstem Reservoir System (Reservoir System), authorized by the 1944 Flood Control Act, consists of six dams (and reservoirs) constructed on the Missouri River—Fort Peck Dam (Fort Peck Lake), Garrison Dam (Lake Sakakawea), Oahe Dam (Lake Oahe), Big Bend Dam (Lake Sharpe), Fort Randall Dam (Lake Francis Case), and Gavins Point Dam (Lewis and Clark Lake). The Northwestern Division of the U.S. Army Corps of Engineers (USACE) operates the Reservoir System to manage Missouri River flows (regulation) for congressionally authorized purposes of flood control, irrigation, navigation, hydroelectric power generation, water supply, water quality, recreation, and fish and wildlife enhancement. The flooding and resulting damage during 2011 brought increased public attention to the U.S. Army Corps of Engineers (USACE) operation of the Reservoir System.

In order to provide a better understanding of the effects of regulation on the magnitude and duration of Missouri River flooding in 2011, the U.S. Geological Survey (USGS) Precipitation-Runoff Modeling System (PRMS) was used to construct and calibrate a watershed model to simulate unregulated flows, or flows that exclude the effects of Reservoir System operations, during the 2011 water year. Model results were compared with measured regulated flows during the same period to quantify the effects of regulation on stream flow and flooding at selected locations along the Missouri River. Simulated unregulated peak discharges for 2011 also are compared with historical peak discharges for the 1952 flood.

The Missouri River PRMS model was built at a coarse-resolution using the Geospatial Fabric (GF), a new set of methods used by the USGS National Research Program (NRP) to aggregate the catchments and flow lines defined in the National Hydrography Dataset Plus dataset (NHDPlus) to align with the National Hydrologic Model specifications.

Daily Surface Weather and Climatological Summaries (DAYMET) were acquired for October 1, 1999 to September 30, 2011, and post-processed by the USGS Center for Integrated Data Analytics (CIDA) to provide 12 years of input data at a 1-kilometer grid for the Missouri River model construction and calibration. DAYMET data were spatially averaged for each HRU and downloaded using the USGS geodata portal. USGS streamgage data were collected using the USGS Downsizer program which accessed the USGS National Water Information System (USGS NWIS) and retrieved daily streamflow measurements at 100 sites for October 1, 1999, to September 30, 2011. Daily reservoir release data also were included in the model for all Reservoir System dams for that period.

The Missouri River PRMS model calibration was restricted to October 1, 2001 to September 30, 2011, to optimize model simulation of 2011 flows with emphasis placed on the peak flow timing and volumes during high-flow months (April–August). The percent bias (*PBIAS*), root mean square error-observation standard deviation ratio (*RSR*), Nash Sutcliffe efficiency (*NSE*), and coefficient of determination ( $R^2$ ) statistics were used to evaluate model performance. Statistical tests indicate that the model is a good fit for most high-flow months and for annual streamflow estimation at all locations, with increased error associated with low-flow months and during high-flow events that involve overbank storage.

Simulated daily average discharge (SDAD) and measured daily average discharge (MDAD) values, maximum SDAD and MDAD values, and spring and summer SDAD and MDAD peak flow values, are compared directly (magnitude comparison). Two additional methods of comparison are presented to further compare the effects of regulation on flood duration and severity: the number of days in which SDAD values were greater than or equal to the maximum MDAD value, and the number of additional days a National Weather Service (NWS) Minor, Moderate, and Major Flood stage thresholds would have been exceeded if no regulation was in place.

The comparison of simulated unregulated flows to measured flows at dam and selected streamgage locations on the Missouri River (Fort Peck Dam, Montana; Culbertson, Montana; Garrison Dam, North Dakota; Bismarck, North Dakota; Oahe Dam, South Dakota; Big Bend Dam, South Dakota; Fort Randall Dam, South Dakota; Gavins Point Dam, South Dakota; Sioux City, Iowa; Omaha, Nebraska; Nebraska City, Nebraska; Saint Joseph, Missouri; Boonville, Missouri; Kansas City, Missouri; Glasgow, Missouri; Boonville, Missouri; and Saint Charles, Missouri) indicate that operation of the Reservoir System eliminated or greatly reduced spring peak flow events, consolidated two summer peak flow events to one with a markedly decreased magnitude, and maintained higher than normal base flow beyond the end of the water year. The simulated 2011 flood peaks were lower in magnitude than those measured during the 1952 flood, with the exception of Fort Peck and Culbertson, Montana, where the 2011 flood peaks were greater in magnitude. Additional comparative

metrics using NWS flood stages show that without operation of the Reservoir System, flows greater than those measured would have been sustained for much longer, commonly in excess of 30 days, and overall the flooding associated with high-flow events would have been more severe, often progressing to a higher NWS flood stage threshold.

## References Cited

- Blodgett, D.L., 2013, The U.S. Geological Survey climate geo data portal—An integrated broker for climate and geospatial data: U.S. Geological Survey Fact Sheet 2013–3019, 2 p., accessed August 19, 2014, at <http://pubs.usgs.gov/fs/2013/3019>
- Brown, Juliane, B., Sprague, Lori, A., and Dupree, Jean, A., 2011, Nutrient sources and transport in the Missouri River Basin, with emphasis on the effects of irrigation and Reservoirs: *Journal of the American Water Resources Association (JAWRA)*, v. 47, no. 5, p. 1034–1060, accessed August 19, 2014, at <http://dx.doi.org/10.1111/j.1752-1688.2011.00584.x>
- Donohue, R.J., McVicar, T.R., and Roderick, M.L., 2010, Assessing the ability of potential evaporation formulations to capture the dynamics in evaporative demand within a changing climate: *Journal of Hydrology*, v. 386, p. 186–197.
- Falcone, J., 2011, GAGES-II—Geospatial attributes of gages for evaluating streamflow: accessed March 2012 at [http://water.usgs.gov/lookup/getspatial?gagesII\\_Sept2011](http://water.usgs.gov/lookup/getspatial?gagesII_Sept2011).
- Gassman, P.W., Reyes, M.R., Green, C.H., and Arnold, J.G., 2007, The soil and water assessment tool—Historical development, applications, and future research directions: *Transactions of the American Society of Agricultural and Biological Engineers (ASABE)*, v. 50, no. 4, p. 1211–1250.
- Gleeson, T., Smith, L., Moosdorf, N., Hartmann, J., Dürr, H.H., Manning, A.H., van Beek, L.P.H., and Jellinek, A.M., 2011, Mapping permeability over the surface of the Earth: *Geophysical Research Letters*, v. 38, no. L02401, 6 p., accessed August 19, 2014, at <http://onlinelibrary.wiley.com/doi/10.1029/2010GL045565/pdf>.
- Goode, D.J., Koerkle, E.H., Hoffman, S.A., Regan, R.S., Hay, L.E., and Markstrom, S.L., 2010, Simulation of runoff and reservoir inflow for use in a flood-analysis model for the Delaware River, Pennsylvania, New Jersey, and New York, 2004–2006: U.S. Geological Survey Open-File Report 2010–1014, 68 p., accessed August 19, 2014, at <http://pubs.usgs.gov/of/2010/1014/>.
- Grigg, Neil, McCarthy, Cara, Lawrence, Bill, and Ockerman, Darwin, 2011, Review of the regulation of the Missouri River mainstem reservoir system during the flood of 2011: U.S. Army Corps of Engineers, Missouri River Basin Water Management Division, 93 p., accessed August 19, 2014, at <http://www.nwd-mr.usace.army.mil/rcc/reports/pdfs/MRIndependentReviewPanel.pdf>.
- Gupta, H.V., Sorooshian, S., and Yapo, P.O., 1999, Status of automatic calibration for hydrologic models—Comparison with multilevel expert calibration: *Journal of Hydrologic Engineering*, v. 4, no. 2, p. 135–143.
- Hay, L.E., and Umemoto, M., 2006, Multiple-objective stepwise calibration using Luca: U.S. Geological Survey Open-File Report 2006–1323, 25 p., accessed August 19, 2014, at [http://pubs.usgs.gov/of/2006/1323/pdf/OF06-1323\\_508.pdf](http://pubs.usgs.gov/of/2006/1323/pdf/OF06-1323_508.pdf).
- Homer, C., Dewitz, J., Fry, J., Coan, M., Hossain, N., Larson, C., Herold, N., McKerrow, A., VanDriel, J.N., and Wickham, J., 2007, Completion of the 2001 National Land Cover Database for the conterminous United States: *Photogrammetric Engineering and Remote Sensing*, v. 73, no. 4, p. 337–341.
- Horizon Systems Corporation, 2006, National Hydrography Dataset Plus (NHDPlus): Horizon Systems Corporation, accessed March 16, 2012, accessed August 19, 2014, at <http://www.horizon-systems.com/nhdplus/>.
- Jensen, M.E., Robb, D.C.N., and Franzoy, C.E., 1970, Scheduling irrigations using climate-crop-soil data: *Journal of Irrigation and Drainage Engineering*, v. 96, p. 25–28.
- Kalin, L., and Hantush, M.M., 2006, Hydrologic modeling of an Eastern Pennsylvania watershed with NEXRAD and rain gauge data: *Journal of Hydrologic Engineering*, v. 20, no. 11, p. 2285–2307.
- Kingston, D.G., Todd, M.C., Taylor, R.G., Thompson, J.R., and Arnell, N.W., 2009, Uncertainty in the estimation of potential evapotranspiration under climate change: *Geophysical Research Letters*; v. 36, L20403. doi:10.1029/2009GL040267, accessed August 19, 2014, at <http://onlinelibrary.wiley.com/doi/10.1029/2009GL040267/pdf>.
- Markstrom, S.L., Hay, L.E., Ward-Garrison, C.D., Riskey, J.C., Battaglin, W.A., Bjerklie, D.M., Chase, K.J., Christiansen, D.E., Dudley, R.W., Hunt, R.J., Kocot, K.M., Mastin, M.C., Regan, R.S., Viger, R.J., Vining, K.C., and Walker, J.F., 2012, Integrated watershed-scale response to climate change for selected basins across the United States: U.S. Geological Survey Scientific Investigations Report 2011–5077, 143 p., accessed August 19, 2014, at <http://pubs.usgs.gov/sir/2011/5077/>.

- Markstrom, S.L., Niswonger, R.G., Regan, R.S., Prudic, D.E., and Barlow, P.M., 2008, GSFLOW—Coupled ground-water and surface-water flow model based on the integration of the Precipitation-Runoff Modeling System (PRMS) and the Modular Ground-Water Flow Model (MODFLOW-2005): U.S. Geological Survey Techniques and Methods 6–D1, 240 p., accessed August 19, 2014, at <http://pubs.usgs.gov/tm/tm6d1/pdf/tm6d1.pdf>.
- Moriasi, D.N., Arnold, J.G., Van Liew, M.W., Binger, R.L., Harmel, R.D., and Veith, T.L., 2007, Model evaluation guidelines for systematic quantification of accuracy in watershed simulations: Transactions of the American Society of Agricultural and Biological Engineers; v. 50, no. 3, p. 885–900.
- Nash, J.E., and Sutcliffe, J.V., 1970, River flow forecasting through conceptual models part I—A discussion of principles: Journal of Hydrology, v. 10, no. 3, p. 282–290.
- National Oceanic and Atmospheric Administration, 2011, United States flood loss report—Water year 2011: National Oceanic and Atmospheric Administration, National Weather Service, accessed April 11, 2013, at <http://www.nws.noaa.gov/hic/summaries/WY2011.pdf>.
- Schwarz, G.E., Hoos, A.B., Alexander, R.B., and Smith, R.A., 2006, The SPARROW surface water-quality model—Theory, applications and user documentation: U.S. Geological Survey, Techniques and Methods 6–B3, 248 p. and CD-ROM, accessed August 19, 2014, at <http://pubs.usgs.gov/tm/2006/tm6b3/>.
- Singh, J., Knapp, H.V., and Demissie, M., 2004, Hydrologic modeling of the Iroquois River watershed using HSPF and SWAT. ISWS CR 2004–08, Champaign, Ill.: Illinois State Water Survey.
- Sprague, L.A., Clark, M.L., Rus, D.L., Zelt, R.B., Flynn, J.L., and Davis, J.V., 2006, Nutrient and suspended-sediment trends in the Missouri River Basin, 1993–2003: U.S. Geological Survey Scientific Investigations Report 2006–5231, 80 p., accessed August 19, 2014, at <http://pubs.usgs.gov/sir/2006/5231/>.
- Strahler, A.N., 1952, Hypsometric (area-altitude) analysis of erosional topology: Geological Society of America Bulletin, v. 63, no. 11p, 1117–1142, doi:10.1130/0016-7606(1952)63[1117:HAAOET]2.0CO;2.
- Thornton, P.E., Thornton, M.M., Mayer, B.W., Wilhelmi, N., Wei, Y., Cook, R.B., 2012, Daymet: Daily surface weather on a 1 km grid for North America, 1980–2012, accessed November 02, 2013, at <http://daymet.ornl.gov/> from Oak Ridge National Laboratory Distributed Active Archive Center, Oak Ridge, Tennessee, U.S.A.
- U.S. Army Corps of Engineers, 2006, Missouri River main-stem reservoir system master water control manual Missouri River Basin, reservoir control center, U.S. Army Corps of Engineers, Northwestern Division-Missouri River Basin: Omaha, Nebraska, accessed August 19, 2014, at [www.nwd-mr.usace.army.mil/rcc/reports/mmanual/MasterManual.pdf](http://www.nwd-mr.usace.army.mil/rcc/reports/mmanual/MasterManual.pdf).
- U.S. Department of Agriculture, 1994, State Soil Geographic (STATSGO) data base—Data use information: Soils Conservation Service, National Cartography and GIS Center, Fort Worth, Texas.
- U.S. Geological Survey, 2012, National hydrography dataset: U.S. Geological Survey, accessed April 30, 2012, at <http://nhd.usgs.gov/>.
- U.S. Geological Survey, 2013, U.S. Geological Survey National Water Information System, accessed November 02, 2013, at <http://waterdata.usgs.gov/nwis>.
- Viger, R.J., 2012, Geospatial fabric for a National hydrologic model using NHDPlus: Proceedings from the American Water Resources Association 2012 Annual Water Resources Conference, Nov. 12–15, 2012, Jacksonville, Fla.
- Viger, R.J., 2014, Preliminary spatial parameters for PRMS based on the Geospatial Fabric, NLCD2001 and SSURGO, U.S. Geological Survey, accessed August 19, 2014, at <http://dx.doi.org/doi:10.5066/F7WM1BF7>.
- Viger, R.J., and Leavesley, G.H., 2007, The GIS weasel user’s manual: U.S. Geological Survey Techniques and Methods, book 6, chap. B4, accessed August 19, 2014, at <http://pubs.usgs.gov/tm/2007/06B04/>.
- Ward-Garrison, Christian, Markstrom, S.L., and Hay, L.E., 2009, Downsizer—A graphical user interface-based application for browsing, acquiring, and formatting time-series data for hydrologic modeling: U.S. Geological Survey Open-File Report 2009–1166, 27 p., accessed August 19, 2014, at <http://pubs.usgs.gov/of/2009/1166/>.
- Watermolen, John, 2005, National Atlas of the United States, version 2.4: Reston, Virginia, 1:2,000,000 scale hydrologic unit boundaries.
- Wells, J.V.B., 1955, Floods of April 1952 in the Missouri River basin: U.S. Geological Survey Water Supply Paper 1260-B, accessed August 19, 2014, at <http://pubs.er.usgs.gov/publication/wsp1260B/>.
- Wolock, D.M., 1997, STATSGO soil characteristics for the conterminous United States: U.S. Geological Survey Open-File Report 97–656, accessed August 19, 2014, at <http://pubs.er.usgs.gov/publication/ofr97656>.



Drained scour hole west of Mound City, Missouri where Missouri Trooper Fred Guthrie and his K-9 Reed were swept away by floodwaters, November 2011. Photograph by Jeff Herzer ([jeffherzer.com](http://jeffherzer.com)) and Missouri State Highway Patrol. Pilot: Sgt. Kevin G. Haywood.

Publishing support provided by:  
Rolla Publishing Service Center

For more information concerning this publication, contact:  
Chief, USGS Office of Surface Water  
415 National Center  
12201 Sunrise Valley Drive  
Reston, VA 20192  
(703) 648-5301

Or visit the Office of Surface Water Web site at:  
<http://water.usgs.gov/osw/>



